


# Water Resources Data Pennsylvania Water Year 2001

## Volume 2. Susquehanna and Potomac River Basins

By R.R. Durlin and W.P. Schaffstall

Water-Data Report PA-01-2

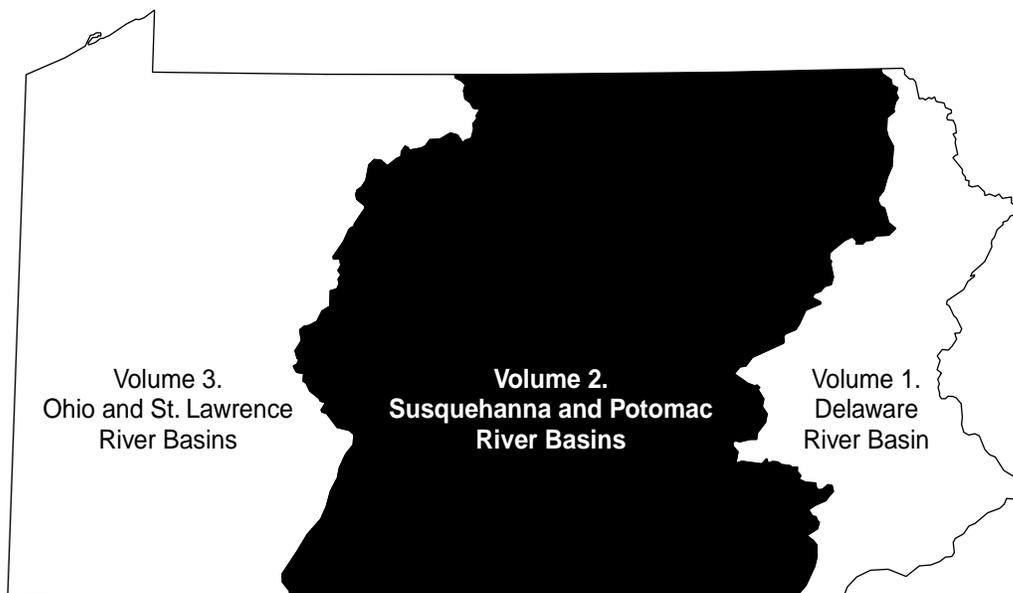

Prepared in cooperation with the Pennsylvania Department of Environmental Protection, the Baltimore District of the U.S. Army Corps of Engineers, and with other State, municipal, and Federal agencies.



U.S. DEPARTMENT OF THE INTERIOR

GALE A. NORTON, *Secretary*

U.S. GEOLOGICAL SURVEY

Charles G. Groat, *Director*

For additional information write to:  
District Chief, Water Resources Division  
U.S. Geological Survey  
215 Limekiln Road  
New Cumberland, Pennsylvania 17070

2002

## PREFACE

This volume of the annual hydrologic data report of Pennsylvania is one of a series of annual reports that document hydrologic data gathered from the U.S. Geological Survey's surface- and ground-water data-collection networks in each State, Puerto Rico, and the Trust Territories. These records of streamflow, ground-water levels, and quality of water provide the hydrologic information needed by State, local, and Federal agencies, and the private sector for developing and managing our Nation's land and water resources. Hydrologic data for Pennsylvania are contained in 3 volumes.

Volume 1. Delaware River Basin

Volume 2. Susquehanna and Potomac River Basins

Volume 3. Ohio and St. Lawrence River Basins

Volume 2 was prepared in cooperation with the Commonwealth of Pennsylvania and other agencies under the general supervision of William H. Werkheiser, District Chief, Pennsylvania District; Robert A. Hainly, Assistant District Chief for Hydrologic Surveillance and Data Management; Randall R. Durlin, Chief of the Hydrologic Surveillance Program, New Cumberland District Office, and William P. Schaffstall, Chief, Williamsport Project Office. It is the product of a team effort by dedicated personnel of the U.S. Geological Survey who collected, compiled, analyzed, verified, and organized these data, and who typed, edited, and assembled the report. In addition to the authors, who had primary responsibility for assuring that the information contained herein is accurate, complete, and adheres to Geological Survey policy and established guidelines, the following individuals contributed significantly to the collection, processing, and tabulation of these data:

S. W. Babula  
M. R. Beaver  
J. K. Bender  
R. T. Campbell  
J. J. Chaplin  
C. A. Cravotta  
L. J. Fekula  
K. S. Fishel  
J. T. Fisher  
D. G. Galeone  
D. R. Galeone  
J.S. Grover

J. D. Hollenbach  
K. S. Housel  
T. R. Hunt  
J. V. Irvin  
M. Janiszewski  
M. E. Jones  
D. G. Kelley  
B. D. Lindsey  
C.A. Loper  
D. J. Low  
R. A. Ludlow

T. M. Noonan  
J. D. Riggle  
M. A. Roland  
J. J. Rote  
W. K. Schachner  
M. D. Schuster  
R. W. Siwicki  
M. V. Truhlar  
K. E. Tuers  
N. J. Weisbeker  
T. M. Zimmerman

# CONTENTS

	<b>Page</b>
Preface .....	iii
List of surface-water stations, in downstream order, for which records are published in this volume .....	vii
List of ground-water wells, by county, for which records are published in this volume .....	x
List of discontinued continuous-record surface-water discharge stations .....	xii
List of discontinued continuous-record surface-water-quality stations .....	xvi
Pennsylvania District office locations and addresses .....	xx
Introduction .....	1
Cooperation .....	1
Summary of hydrologic conditions .....	3
Surface water .....	3
Reservoirs .....	6
Ground water .....	6
References .....	6
Special networks and programs .....	8
Explanation of the records .....	8
Station identification numbers .....	9
Downstream-order system .....	9
Latitude-longitude system .....	9
Records of stage and water discharge .....	10
Data collection and computation .....	10
Data presentation .....	11
Station manuscript .....	11
Data table of daily mean values .....	12
Statistics of monthly mean data .....	12
Summary statistics .....	12
Identifying estimated daily discharge .....	13
Accuracy of the records .....	14
Other records available .....	14
Records of surface-water quality .....	14
Classification of records .....	14
Arrangement of records .....	14
On-site measurements and sample collection .....	15
Water temperature .....	15
Sediment .....	15
Laboratory measurements .....	16
Data presentation .....	16
Accuracy of the records .....	16
Remark codes .....	17
Water quality-control data .....	18
Records of ground-water levels .....	19
Data collection and computation .....	19
Data presentation .....	19
Data table of water levels .....	20
Records of ground-water quality .....	20
Data collection and computation .....	20
Data presentation .....	21
Access to USGS Water Data .....	21
Definition of terms .....	22
Publications on Techniques of Water-Resources Investigations .....	31
Special Notes, Remark Codes, and Selected Constituent Definitions .....	38

## CONTENTS--Continued

	<b>Page</b>
Station records, surface water	
Continuous water-discharge and water-quality station records .....	40
Discharge at partial-record stations and miscellaneous sites	
Crest-stage partial-record stations .....	290
Miscellaneous sites .....	293
Analyses of streamflow samples collected at partial-record stations .....	298
Analyses of samples collected at special-study sites	
Powell and Armstrong Creeks Watershed assessment project .....	302
Bear Creek Watershed project .....	308
Swatara Creek project .....	316
Special Notes, Remark Codes, and Selected Constituent Definitions .....	372
Station records, ground water	
Water-level and water-quality .....	374
Ground-water data collected at special-study sites	
Hydrogeology of selected area of Carroll Valley, Adams County .....	420
Viruses in ground-water project .....	425
Bacteria in ground-water project .....	432
Index .....	435

### ILLUSTRATIONS

Figure 1. Comparison of monthly precipitation at two National Oceanic and Atmospheric Administration climatological stations during the 2001 water year and mean monthly precipitation for the period 1961 through 1990 ....	4
2. Comparison of streamflow at two long-term streamflow-gaging stations during the 2001 water year and the median monthly and annual mean streamflow for the period 1961 through 1990.....	5
3. Relation between 2001 seasonal ground-water levels and long-term ground-water levels .....	7
4. System for numbering wells and miscellaneous sites .....	9
5-12. Maps showing:	
5. Location of continuous-record data-collection stations and network observation wells, Susquehanna River Basin .....	35
6. Location of partial-record data-collection stations, Susquehanna River Basin.....	36
7. Location of continuous- and partial-record data-collection stations, Potomac River Basin .....	37
8. Location of sites sampled for the Powell and Armstrong Creeks Watershed assessment project.....	304
9. Location of sites sampled for the Bear Creek Watershed project .....	308
10. Location of water-quality and streamflow monitoring stations in the Swatara Creek Basin.....	317
11. Location of wells sampled as part of the viruses in ground-water project.....	425
12. Location of wells sampled as part of the bacteria in ground-water project .....	432

### TABLES

Table 1. Maximum allowable limits for continuous water-quality monitoring sensors .....	17
2. Rating continuous water-quality records .....	17
3. Powell and Armstrong Creeks Watershed assessment station lists .....	303
4. Swatara Creek project station list .....	318

**SURFACE-WATER STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME**

[Letters after station name designate type of data: (d) discharge, (c) chemical, (b) biological, (t) water temperature, (sc) specific conductance, (e) elevation, gage heights, or contents.]

**NORTH ATLANTIC SLOPE BASINS**

	<b>Station number</b>	<b>Page</b>
<b>SUSQUEHANNA RIVER BASIN</b>		
<b>CHEMUNG RIVER BASIN</b>		
Tioga River near Mansfield (d) .....	01516350	40
Corey Creek near Mainesburg (d) .....	01516500	42
Tioga River at Tioga (d) .....	01518000	44
Tioga River at Tioga Junction (d) .....	01518700	46
Cowanesque River at Westfield (d) .....	01518862	48
Cowanesque River near Lawrenceville (d) .....	01520000	50
Reservoirs in Chemung River Basin (e) .....		52
Susquehanna River at Towanda (d) .....	01531500	54
<b>TOWANDA CREEK BASIN</b>		
Towanda Creek near Monroeton (d) .....	01532000	56
Susquehanna River at Meshoppen (d) .....	01533400	58
<b>TUNKHANNOCK CREEK BASIN</b>		
Tunkhannock Creek near Tunkhannock (d) .....	01534000	60
<b>LACKAWANNA RIVER BASIN</b>		
Stillwater Lake near Forest City (e) .....	01534180	63
Lackawanna River near Forest City (d) .....	01534300	64
Lackawanna River at Archbald (d) .....	01534500	66
Lackawanna River at Old Forge (d) .....	01536000	68
Susquehanna River at Wilkes-Barre (d) .....	01536500	70
<b>WAPWALLOPEN CREEK BASIN</b>		
Wapwallopen Creek near Wapwallopen (d) .....	01538000	72
<b>FISHING CREEK BASIN</b>		
Fishing Creek near Bloomsburg (d) .....	01539000	74
Susquehanna River at Danville (d) .....	01540500	76
<b>WEST BRANCH SUSQUEHANNA RIVER BASIN</b>		
West Branch Susquehanna River at Bower (d) .....	01541000	78
West Branch Susquehanna River at Curwensville (d) .....	01541200	80
West Branch Susquehanna River at Hyde (d) .....	01541303	82
Clearfield Creek at Dimeling (d) .....	01541500	84
Bennett Branch Sinnemahoning Creek (head of Sinnemahoning Creek):		
Driftwood Branch Sinnemahoning Creek:		
North Creek:		
Waldy Run near Emporium (d) .....	01542810	86
Driftwood Branch Sinnemahoning Creek at Sterling Run (d) .....	01543000	88
Sinnemahoning Creek at Sinnemahoning (d) .....	01543500	90
First Fork Sinnemahoning Creek near Sinnemahoning (d) .....	01544000	92
Kettle Creek at Cross Fork (d) .....	01544500	94
Kettle Creek near Westport (d) .....	01545000	96
West Branch Susquehanna River at Renovo (d) .....	01545500	98
Young Womans Creek near Renovo (d) .....	01545600	100

SURFACE-WATER STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

**NORTH ATLANTIC SLOPE BASINS**--Continued

	<b>Station number</b>	<b>Page</b>
<b>SUSQUEHANNA RIVER BASIN</b> --Continued		
Bald Eagle Creek:		
Spring Creek at Houserville (d).....	01546400	102
Spring Creek near Axemann (d).....	01546500	104
Spring Creek at Milesburg (d).....	01547100	106
Bald Eagle Creek below Spring Creek at Milesburg (d).....	01547200	108
Bald Eagle Creek at Blanchard (d).....	01547500	110
Marsh Creek at Blanchard (d).....	01547700	112
Beech Creek at Monument (d).....	01547950	114
Pine Creek at Cedar Run (d).....	01548500	116
Little Pine Creek:		
Blockhouse Creek near English Center (d).....	01549500	118
Pine Creek below Little Pine Creek near Waterville (d).....	01549700	120
Lycoming Creek near Trout Run (d).....	01550000	122
West Branch Susquehanna River at Williamsport (d).....	01551500	124
Loyalsock Creek at Loyalsockville (d).....	01552000	126
Muncy Creek near Sonestown (d).....	01552500	128
West Branch Susquehanna River at Lewisburg (d).....	01553500	130
Chillisquaque Creek at Washingtonville (d).....	01553700	132
Reservoirs in West Branch Susquehanna River Basin (e).....		134
Susquehanna River at Sunbury (d).....	01554000	136
<b>PENNS CREEK BASIN</b>		
Penns Creek at Penns Creek (d).....	01555000	138
<b>EAST MAHANTANGO CREEK BASIN</b>		
East Mahantango Creek near Dalmatia (d).....	01555500	140
<b>BEAR CREEK BASIN</b>		
Bear Creek (BC2) at Lykens (d,c).....	01555539	142
<b>JUNIATA RIVER BASIN</b>		
Frankstown Branch Juniata River (head of Juniata River):		
Frankstown Branch Juniata River at Williamsburg (d).....	01556000	148
Little Juniata River:		
Bald Eagle Creek at Tyrone (d).....	01557500	150
Little Juniata River at Spruce Creek (d).....	01558000	152
Juniata River at Huntingdon (d).....	01559000	154
Raystown Branch Juniata River:		
Dunning Creek:		
Dunning Creek at Belden (d).....	01560000	156
Raystown Branch Juniata River at Saxton (d).....	01562000	158
Raystown Lake near Huntingdon (e).....	01563100	161
Raystown Branch Juniata River below Raystown Dam near Huntingdon (d).....	01563200	162
Juniata River at Mapleton Depot (d).....	01563500	164
Aughwick Creek near Three Springs (d).....	01564500	166
Juniata River at Newport (d).....	01567000	168
<b>SHERMAN CREEK BASIN</b>		
Sherman Creek:		
Bixler Run near Loysville (d).....	01567500	170
Sherman Creek at Shermans Dale (d).....	01568000	174
<b>CONODOGUINET CREEK BASIN</b>		
Conodoguinet Creek:		
Letort Spring Run near Carlisle (d).....	01569800	176
Conodoguinet Creek near Hogestown (d,c).....	01570000	178
Susquehanna River at Harrisburg (d).....	01570500	184

SURFACE-WATER STATIONS, IN DOWNSTREAM ORDER, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

**NORTH ATLANTIC SLOPE BASINS**--Continued

	<b>Station number</b>	<b>Page</b>
<b>SUSQUEHANNA RIVER BASIN</b> --Continued		
<b>YELLOW BREECHES CREEK BASIN</b>		
Yellow Breeches Creek:		
Yellow Breeches Creek near Camp Hill (d).....	01571500	186
<b>SWATARA CREEK BASIN</b>		
Swatara Creek, Site C1, near Newtown (c,sc,pH,t) .....	0157155010	188
Swatara Creek, Site C3, near Newtown (d,c,sc,pH,t) .....	0157155014	196
Rowe Drainage Tunnel, Site E2-244, near Joliett (c,sc,pH,t) .....	403542076263201	206
Lorberry Creek near Lorberry Junction (d,c,sc,pH,t).....	01571778	214
Swatara Creek at Ravine (d,c,sc,pH,t).....	01571820	224
Swatara Creek near Pine Grove (d).....	01572025	236
Swatara Creek near Inwood (d).....	01572190	238
Swatara Creek at Harper Tavern (d).....	01573000	240
Swatara Creek near Hershey (d).....	01573560	242
<b>WEST CONEWAGO CREEK BASIN</b>		
West Conewago Creek near Manchester (d).....	01574000	244
<b>CODORUS CREEK BASIN</b>		
Codorus Creek at Spring Grove (d).....	01574500	246
Reservoirs in Codorus Creek Basin (e) .....		249
Susquehanna River at Marietta (d) .....	01576000	250
<b>CONESTOGA RIVER BASIN</b>		
Conestoga River:		
Conestoga River at Lancaster (d) .....	01576500	252
Mill Creek:		
Big Spring Run below Willow Branch near Willow Street (c,b).....	01576519	254
Big Spring Run near Willow Street (d,c,b) .....	01576521	256
Unnamed Tributary:		
South Fork Unnamed Tributary to Big Spring Run at Lampeter (c) .....	01576525	262
North Fork Unnamed Tributary to Big Spring Run near Willow Street (c,b) .....	01576526	263
North Fork Unnamed Tributary to Big Spring Run near Lampeter (d,c) .....	015765265	266
North Fork Unnamed Tributary to Big Spring Run at Lampeter (d,c) .....	01576527	270
Unnamed Tributary to Big Spring Run near Willow Street (c,b) .....	01576528	274
Unnamed Tributary to Big Spring Run near Lampeter (d,c,b) .....	01576529	278
Conestoga River at Conestoga (d).....	01576754	284
<b>POTOMAC RIVER BASIN</b>		
<b>TONOLOWAY CREEK BASIN</b>		
Tonoloway Creek near Needmore (d) .....	01613050	286
<b>CONOCOCHEAGUE CREEK BASIN</b>		
Dennis Creek near Chambersburg (d) .....	01614137	288
<hr/>		
Discharge at partial-record stations and miscellaneous sites		
Crest-stage partial-record stations .....		290
Miscellaneous sites.....		293
Analysis of streamflow samples collected at partial-record and special-study sites		
Analysis of streamflow samples collected at partial-record stations .....		298
Analysis of samples collected at special-study sites		
Powell and Armstrong Creeks Watershed assessment project.....		302
Bear Creek Watershed project.....		308
Swatara Creek project .....		316

**GROUND-WATER WELLS, BY COUNTY, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME**

(Letters after local well number designate type of data: (l) water level, (c) chemical)

**GROUND-WATER RECORDS**

**Page**

<b>ADAMS COUNTY</b>		
Well 395846077040601	Local number AD 146 (l) .....	374
<b>BEDFORD COUNTY</b>		
Well 400217078281901	Local number BD 150 (l) .....	375
Well 400450078303001	Local number BD 654 (l) .....	376
<b>BLAIR COUNTY</b>		
Well 402452078271301	Local number BA 74 (l) .....	377
<b>BRADFORD COUNTY</b>		
Well 414330076280501	Local number BR 92 (l) .....	378
<b>CAMERON COUNTY</b>		
Well 412732078034201	Local number CM 13 (l) .....	379
<b>CENTRE COUNTY</b>		
Well 404518077575501	Local number CE 118 (l) .....	380
<b>CLINTON COUNTY</b>		
Well 411424077462201	Local number CN 1 (l) .....	381
Well 410736077263301	Local number CN 391 (l) .....	382
Well 410741077262601	Local number CN 392 (l) .....	383
Well 410740077262901	Local number CN 393 (l) .....	384
Well 410739077263601	Local number CN 394 (l) .....	385
<b>CUMBERLAND COUNTY</b>		
Well 400209077183301	Local number CU 2 (l) .....	386
<b>DAUPHIN COUNTY</b>		
Well 402118076462201	Local number DA 350 (l) .....	387
<b>FRANKLIN COUNTY</b>		
Well 394731077411701	Local number FR 332 (l) .....	388
<b>HUNTINGDON COUNTY</b>		
Well 401843078075401	Local number HU 301 (l) .....	389
<b>JUNIATA COUNTY</b>		
Well 402411077374801	Local number JU 351 (l) .....	390
<b>LANCASTER COUNTY</b>		
Well 400506076235201	Local number LN 514 (l) .....	391
Well 401637076071501	Local number LN 1351 (l) .....	392
Well 395947076145901	Local number LN 2037 (l,c) .....	394
Well 395947076145902	Local number LN 2038 (l,c) .....	396
Well 395947076145903	Local number LN 2039 (l,c) .....	398
Well 395947076145904	Local number LN 2040 (l,c) .....	400
Well 395957076155201	Local number LN 2041 (c) .....	402
Well 395957076155202	Local number LN 2042 (l,c) .....	403
Well 395957076155203	Local number LN 2043 (c) .....	405
Well 395957076155204	Local number LN 2044 (l,c) .....	406
<b>LUZERNE COUNTY</b>		
Well 411756076162701	Local number LU 294 (l) .....	408
<b>LYCOMING COUNTY</b>		
Well 412427076594401	Local number LY 112 (l) .....	409
<b>MIFFLIN COUNTY</b>		
Well 404140077354001	Local number MF 344 (l) .....	410
<b>NORTHUMBERLAND COUNTY</b>		
Well 404239076362001	Local number NU 567 (l) .....	411
<b>POTTER COUNTY</b>		
Well 414640077493801	Local number PO 72 (l) .....	412
<b>SNYDER COUNTY</b>		
Well 403939076591001	Local number SN 130 (l) .....	413
<b>SULLIVAN COUNTY</b>		
Well 413026076352901	Local number SU 34 (l) .....	414

GROUND-WATER WELLS, BY COUNTY, FOR WHICH RECORDS ARE PUBLISHED IN THIS VOLUME

**GROUND-WATER RECORDS**

	<b>Page</b>
<b>SUSQUEHANNA COUNTY</b>	
Well 415323077451301 Local number SQ 61 (l) .....	415
<b>TIOGA COUNTY</b>	
Well 414513077333701 Local number TI 100 (l) .....	416
<b>UNION COUNTY</b>	
Well 405928077115501 Local number UN 51 (l) .....	417
<b>YORK COUNTY</b>	
Well 400916076492301 Local number YO 1147 (l) .....	418

**GROUND-WATER DATA COLLECTED AT SPECIAL-STUDY SITES**

Hydrogeology of selected area of Carroll Valley, Adams County .....	420
Viruses in ground-water project .....	425
Bacteria in ground-water project .....	432

The following continuous-record surface-water discharge stations (listed by downstream order) have been discontinued. Daily streamflow records were collected and published for the period of record shown for each station. Discontinued stations with less than 3 years of record have not been included. Information regarding these stations may be obtained from the District Office at the address given on the back of the title page of this report.

#### DISCONTINUED CONTINUOUS-RECORD SURFACE-WATER DISCHARGE STATIONS

Station name	Station number	Drainage area (mi <sup>2</sup> )	Period of record (water years)
SUSQUEHANNA RIVER BASIN			
Elk Run near Mainesburg	01517000	10.2	1955-78
Crooked Creek at Tioga	01518500	122	1954-74
N. Branch Sugar Creek trib. near Columbia Crossroads	01531250	8.83	1963-68
Middle Br. Wyalusing Creek trib. near Birchardsville	01532850	5.67	1965-79
North Branch Mehoopany Creek near Lovelton	01533500	35.2	1941-58
Butler Creek at Gibson	01533800	7.38	1974-79
South Branch Tunkhannock Creek near Montdale	01533950	12.6	1961-78
Lackawanna River at Moosic	01535500	264	1914-28
Toby Creek at Luzerne	01537000	32.4	1941-93
Solomon Creek at Wilkes-Barre	01537500	15.7	1940-90
Nescopeck Creek near St. Johns	01538500	49.0	1920-26
Little Nescopeck Creek tributary near Freeland	01538510	mine discharge	1974-79, 1996-98
Applemans Run above Light Street	01539200	1.72	1972-74
Applemans Run below Light Street	01539210	1.99	1972-74
Little Fishing Creek at Evers Grove	01539500	56.5	1941-58
Fishing Creek at Bloomsburg	01540000	355	1914-28
Trexler Run near Ringtown	01540200	1.77	1963-81
Bradley Run near Ashville	01541308	6.77	1968-80
Moshannon Creek at Osceola Mills	01542000	68.8	1941-93
West Branch Susquehanna River at Karthaus	01542500*	1,462	1940-95
North Bald Eagle Creek at Milesburg	01546000	119	1911-28, 1934
Spring Creek near Bellefonte	01547000	136	1911-19
South Fork Beech Creek near Snow Shoe	01547800	12.2	1969-81
Bald Eagle Creek near Beech Creek Station	01548005*	562	1910-95
Wilson Creek above Sand Run near Antrim	01548408	12.6	1978-82
Mitchell Mine discharge #2 near Antrim	01548413	mine discharge	1978-81
Anna S mine discharge #1 near Antrim	01548416	mine discharge	1978-81
Hunter Drift discharge near Antrim	01548418	mine discharge	1978-81
Pine Creek near Waterville	01549000	750	1909-20

**DISCONTINUED CONTINUOUS-RECORD SURFACE-WATER DISCHARGE STATIONS (Continued)**

Station name	Station number	Drainage area (mi <sup>2</sup> )	Period of record (water years)
Blockhouse Creek tributary at Liberty	01549100	1.08	1973-77
Blockhouse Creek at Buttonwood	01549300	22.3	1973-77
Steam Valley Run at Buttonwood	01549350	5.34	1973-77
Antes Creek near Jersey Shore	01549755	53.3	1974-77
Larrys Creek at Cogan House	01549780	6.80	1961-78
White Deer Cr. above Sand Spring Run near White Deer	01553120	17.8	1968-73
Sand Spring Run near White Deer	01553130	4.93	1968-81
White Deer Creek near White Deer	01553140	40.0	1968-73
East Branch Chillisquaque Creek near Washingtonville	01553600	9.48	1960-78
Shamokin Creek near Shamokin	01554500	54.2	1938-93
East Mahantango Creek at Klingerstown	01555400	44.7	1993-95, 1997-2000
Little Juniata River at Tipton	01556500	93.7	1946-62
Little Juniata River near Tyrone	01557000	101	1940-45
Schell Run at Tyrone	01557100	1.68	1958-62
Shaver Creek near Petersburg	01558500	46.4	1930-38
Standing Stone Creek near Huntingdon	01559500	128	1930-58
Sulphur Springs Creek near Manns Choice	01559700	5.28	1962-78
Bobs Creek near Pavia	01559795	16.6	1993-1994, 1997-2000
Dunning Creek at Yount	01560500	191	1930-39
Brush Creek at Gapsville	01561000	36.8	1930-58
Great Trough Creek near Marklesburg	01562500	84.6	1930-57
Raystown Branch Juniata River near Huntingdon	01563000 <sup>a</sup>	957	1947-71
Aughwick Creek near Orbisonia	01564000	174	1930-38
Kishacoquillas Creek at Reedsville	01565000*	164	1940-70, 1984-85
Little Lost Creek at Oakland Mills	01565700	6.52	1964-81
Tuscarora Creek near Port Royal	01566000*	214	1911-58
Cocalamus Creek near Millerstown	01566500	57.2	1931-58
Clark Creek near Carsonville	01568500	22.5	1937-96
Stony Cr. above Pump-storage Reservoir near Dauphin	01568700	11.5	1974-80
Stony Creek at Water Tank Trail near Dauphin	01568750	21.9	1974-76, 1985-86
Stony Creek near Dauphin	01569000	33.2	1938-45, 1967-74

**DISCONTINUED CONTINUOUS-RECORD SURFACE-WATER DISCHARGE STATIONS (Continued)**

Station name	Station number	Drainage area (mi <sup>2</sup> )	Period of record (water years)
Conodoguinet Creek tributary No. 1 near Enola	01570100	.77	1969-76
Conodoguinet Creek tributary No. 2 near Enola	01570200	.76	1969-76
Conodoguinet Creek tributary No. 2A near Enola	01570230	.60	1969-76
Conodoguinet Creek tributary No. 2B near Enola	01570260	.65	1969-76
Conodoguinet Creek tributary No. 3 near Enola	01570300	.38	1969-76
Paxton Creek near Penbrook	01571000‡	11.2	1940-50, 1985-89, 1992-95
Cedar Run at Eberlys Mill	01571490	12.6	1993-95
Swatara Creek below Ravine	01571827	46.3	1985-87
Swatara Creek above highway bridge 895 at Pine Grove	01571919	72.6	1982-84
Lower Little Swatara Creek at Pine Grove	01572000	34.3	1920-32, 1981-84
Swatara Creek near Suedberg	01572030	124	1985-87
Beck Creek near Cleona	01573086	7.87	1963-81
Bachman Run at Annville	01573095	7.3	1993-95
Quittapahilla Creek near Bellegrove	01573160	74.2	1976-94
Manada Creek at Manada Gap	01573500	13.5	1938-58
Brush Run, Site 2, near McSherrystown	01573810	.38	1985-91
East Branch Codorus Creek tributary near Winterstown	01574800	5.17	1969-75
South Branch Codorus Creek near York	01575000	117	1928-95
Codorus Creek near York	01575500*	222	1940-96
Codorus Creek at Pleasureville	01575585	267	1985-90
Little Conestoga Creek, Site 3A, near Morgantown	0157608335	1.42	1984-91
Little Conestoga Creek near Churchtown	01576085	5.82	1982-95
Muddy Run at Weavertown	01576520	6.68	1993-97
Mill Creek at Eshelman Mill Road near Lyndon	01576540	54.2	1992-99
Swarr Run near Landisville	01576697	8.67	1985-89
Pequea Creek at Martic Forge	01576787*	148	1977-81, 1993-95
Pequea Creek tributary near Mt. Nebo	01576788	.20	1979-86
Susquehanna River near McCalls Ferry	01577000	26,800	1904-11
Bald Eagle Creek near Fawn Grove	01577400	0.43	1986-89
Muddy Creek at Castle Fin	01577500	133	1929-38, 1968-71
Bowery Run near Quarryville	01578400	5.98	1963-81

**DISCONTINUED CONTINUOUS-RECORD SURFACE-WATER DISCHARGE STATIONS (Continued)**

Station name	Station number	Drainage area (mi <sup>2</sup> )	Period of record (water years)
POTOMAC RIVER BASIN			
Wills Creek below Hyndman	01601000	146	1951-67
Evitts Creek near Centerville	01603500	30.2	1933-82
Licking Creek near Sylvan	01613500*	158	1930-41
Conococheague Creek near Fayetteville	01614090*	5.05	1961-81

‡ Operated from October 1991 to September 1995 as a continuous-record surface-water discharge station and water-quality site.

\* Currently operated as a partial-record station.

<sup>a</sup> Records considered equivalent with station 01563200 Raystown Branch Juniata River below Raystown Dam near Huntingdon, published in this volume.

The following continuous-record water-quality stations (listed by downstream order) have been discontinued. Daily records were collected and published for the period shown for each constituent. Discontinued stations with less than 3 years of record, or stations with data collection less than daily, have not been included. If a station had one constituent with 3 or more years of record, all constituents having daily values will be listed for that station regardless of the length of record. Information regarding these stations may be obtained from the District Office at the address given on the back of the title page of this report.

The following are used to identify the record type: SC (specific conductance); pH; Temp (water temperature); DO (dissolved oxygen); Turb (turbidity, in JCU); Sed (sediment concentration and discharge).

#### DISCONTINUED CONTINUOUS-RECORD SURFACE-WATER-QUALITY STATIONS

Station name	Station number	Drainage area (mi <sup>2</sup> )	Type of Record	Period of record (water years)
SUSQUEHANNA RIVER BASIN				
Tioga River near Mansfield	01516350	153	SC <sup>a</sup> , pH <sup>a</sup> , Temp <sup>a</sup> DO <sup>a</sup>	1977-88 <sup>c</sup> 1977-78
Cory Creek near Mainesburg	01516500	12.2	Temp <sup>b</sup> Temp Sed	1960-61 1959, 1962 1954-67 <sup>c</sup>
Elk Run near Mainesburg	01517000	10.2	Temp <sup>b</sup> Temp Sed	1958-59 1957, 1960-62 1955-67
Tioga River at Tioga Junction	01518700	446	SC <sup>a</sup> , pH <sup>a</sup> , Temp <sup>a</sup> , DO <sup>a</sup>	1977-88
Cowanesque River near Lawrenceville	01520000	298	Temp <sup>a</sup>	1972-86
Susquehanna River at Towanda	01531500	7,797	Sed	1951-54
Susquehanna River at Falls	01534090	9,440	SC Temp	1945-51 1947-53
Lackawanna River at Old Forge	01536000	332	Temp	1949-51
Fishing Creek near Bloomsburg	01539000	274	Sed	1967-69
Applemans Run above Light Street	01539200	1.72	Turb, Sed	1972-74
Applemans Run below Light Street	01539210	1.99	Turb, Sed	1972-74
Susquehanna River at Danville	01540500	11,220	SC  Temp  Sed	1946-52, 1963-76 1948-53, 1957-70, 1975-76 1974-76
West Branch Susquehanna River at Bower	01541000	315	Sed	1964-67
West Branch Susquehanna River at Renovo	01545500	2,975	SC <sup>a</sup> , pH <sup>a</sup> , Temp <sup>a</sup> DO	1967-88 <sup>c</sup> 1975-78
West Branch Susquehanna River at Lock Haven	01545800	3,337	SC  pH Temp	1946-51, 1959, 1964-72 1963-72 1946-51, 1958-72

**DISCONTINUED CONTINUOUS-RECORD SURFACE-WATER-QUALITY STATIONS (Continued)**

Station name	Station number	Drainage area (mi <sup>2</sup> )	Type of Record	Period of record (water years)
Bald Eagle Creek below Spring Creek at Milesburg	01547200	265	Temp Temp <sup>b</sup> Sed	1956-58 1967-68 1956-58
Bald Eagle Creek near Milesburg	01547400	296	Temp <sup>a</sup>	1967-90
Bald Eagle Creek at Blanchard	01547500	339	Temp Temp <sup>b</sup> Temp <sup>a</sup> Sed	1957 1967-81 1982-85 1956-58
Marsh Creek at Blanchard	01547700	44.1	Temp Sed	1957 1956-58
Beech Creek at Monument	01547950	152	SC <sup>a</sup> , pH <sup>a</sup> , Temp <sup>a</sup> DO <sup>a</sup>	1969-80 1976-78
Wilson Creek above Sand Run near Antrim	01548408	12.6	Sed	1978-82
Basswood Run near Antrim	01548417	.57	Sed	1978-80
Blockhouse Creek tributary at Liberty	01549100	1.08	Temp <sup>a</sup> , Turb, Sed	1973-77
Blockhouse Creek at Buttonwood	01549300	22.3	Temp <sup>a</sup> , Turb, Sed	1973-77
Steam Valley Run at Buttonwood	01549350	5.34	Temp <sup>a</sup> , Turb, Sed	1973-77
Blockhouse Creek near English Center	01549500	37.7	Temp <sup>a</sup> , Turb, Sed	1973-77
West Branch Susquehanna River at Williamsport	01551500	5,682	SC <sup>a</sup> , pH <sup>a</sup> , Temp <sup>a</sup>	1980-88 <sup>c</sup>
West Branch Susquehanna River at Lewisburg	01553500	6,847	SC, Temp  Sed	1944-53 <sup>c</sup> , 1957-58, 1975-76 1975-76
Shamokin Creek near Shamokin	01554500	54.2	Temp	1959-61
East Mahantango Creek at Klingerstown	01555400	44.7	SC <sup>a</sup> Temp	1993-95 1993-95, 1997-2000
Juniata River at Huntingdon	01559000	816	Temp	1948-51, 1981-86 <sup>c</sup>
Bobs Creek near Pavia	01559795	16.6	SC <sup>a</sup> Temp <sup>a</sup>	1994-95 1994-95, 1997-2000
Raystown Branch Juniata River near Huntingdon	01563000	957	Temp	1947-50
Raystown Branch Juniata River below Raystown Dam near Huntingdon	01563200	960	Temp <sup>a</sup>	1978-86 <sup>c</sup>
Bixler Run near Loysville	01567500	15.0	Temp Temp <sup>a</sup> Sed	1957-62 1963-65 1954-71

**DISCONTINUED CONTINUOUS-RECORD SURFACE-WATER-QUALITY STATIONS (Continued)**

Station name	Station number	Drainage area (mi <sup>2</sup> )	Type of Record	Period of record (water years)
Sherman Creek at Shermans Dale	01568000	200	Temp <sup>b</sup>	1954-56
Stony Creek at Water Tank Trail near Dauphin	01568750	21.9	Temp <sup>b</sup>	1974-76
Conodoguinet Creek tributary No. 1 near Enola	01570100	.77	Turb Sed	1972-75 1969-76
Conodoguinet Creek tributary No. 2 near Enola	01570200	.76	Turb Sed	1973-75 1973-76
Conodoguinet Creek tributary No. 2A near Enola	01570230	.70	Turb Sed	1973-75 1973-76
Conodoguinet Creek tributary No. 2B near Enola	01570260	.65	Turb Sed	1973-75 1973-76
Conodoguinet Creek tributary No. 3 near Enola	01570300	.38	Turb Sed	1972-75 1969-76
Susquehanna River at Harrisburg	01570500	24,100	SC <sup>a</sup> , pH <sup>a</sup> , Temp <sup>a</sup> , DO <sup>a</sup> Sed	1974-79 1964-81 <sup>c</sup>
Cedar Run at Eberlys Mill	01571490	12.6	SC <sup>a</sup> , Temp <sup>a</sup>	1993-95
Swatara Creek above Highway bridge 895 at Pine Grove	01571919	72.6	SC Temp, Sed	1983-84 1982-84
Lower Little Swatara Creek at Pine Grove	01572000	34.3	SC Temp, Sed	1981, 1983-84 1981-84
Swatara Creek at Harper Tavern	01573000	337	SC Temp Sed	1977-79 1959-61, 1977-79 1959-60, 1977-79
Conestoga River at Lancaster	01576500	324	SC Temp Sed	1948-50, 1964-70, 1974-75 1948-50, 1959-70, 1974-75 1974-75
Muddy Creek at Muddy Creek Forks	01577300	71.9	SC <sup>a</sup> , Temp <sup>a</sup>	1993-95

<sup>a</sup> Max, Min, Mean values.

<sup>b</sup> Max, Min values.

<sup>c</sup> Most years.

## INTRODUCTION

The Water Resources Division of the U.S. Geological Survey, in cooperation with State, municipal, and Federal agencies, collects a large amount of data pertaining to the water resources of Pennsylvania each water year. These data, accumulated during many water years, constitute a valuable data base for developing an improved understanding of the water resources of the State. To make these data readily available to interested parties outside the Geological Survey, these data are published annually in this report series entitled "Water Resources Data - Pennsylvania, Volumes 1, 2, and 3." Volume 1 contains data for the Delaware River Basin; Volume 2, the Susquehanna and Potomac River Basins; and Volume 3, the Ohio and St. Lawrence River Basins.

This report, Volume 2, contains: (1) discharge records for 83 continuous-record streamflow-gaging stations, 15 partial-record stations, and 24 special study and miscellaneous streamflow sites; (2) elevation and contents records for 12 lakes and reservoirs; (3) water-quality records for 9 streamflow gaging stations and 73 partial-record and project stations; and (4) water-level records for 36 ground-water network observation wells and water-quality analyses of ground water from 8 wells; (5) water-quality analyses at 123 special study ground-water wells; and, (6) miscellaneous water-level measurements at 80 special study ground-water wells. Additional water data collected at various sites not involved in the systematic data-collection program may also be presented.

Publications similar to this report are published annually by the Geological Survey for all States. For the purpose of archiving, these official reports have an identification number consisting of the two-letter State abbreviation, the last two digits of the water year, and the volume number. For example, this volume is identified as "U.S. Geological Survey Water-Data Report PA-01-2." These water-data reports, beginning with the 1971 water year, are for sale as paper copy or microfiche by the National Technical Information Service, U.S. Department of Commerce, Springfield, VA 22161.

The annual series of Water Data Reports for Pennsylvania began with the 1961 water-year report and contained only data relating to quantities of surface water. With the 1964 water year, a companion report (part 2) was introduced that contained only data relating to water quality. Beginning with the 1975 water year the report was changed to three volumes (by river basin), with each volume containing data on quantities of surface water, quality of surface and ground water, and ground-water levels.

Prior to the introduction of this series and for several years concurrent with it, water-resources data for Pennsylvania were published in U.S. Geological Survey Water-Supply Papers. Data on stream discharge and stage, and on lake or reservoir contents and stage, through September 1960, were published annually under the title "Surface-Water Supply of the United States," which was released in numbered parts as determined by natural drainage basins. For the 1961-70 water years, these data were published in two 5-year reports. Data prior to 1961 are included in two reports: "Compilation of Records of Surface Waters of the United States through 1950," and "Compilation of Records of Surface Waters of the United States, October 1950 to September 1960." Data for Pennsylvania are published in Parts 1, 3, and 4. Data on chemical quality, temperature, and suspended sediment for the 1941-70 water years were published annually under the title "Quality of Surface Waters of the United States," and ground-water levels for the 1935-74 water years were published annually under the title "Ground-Water Levels in the United States." The above mentioned Water-Supply Papers may be consulted in the libraries of the principal cities of the United States and may be purchased from the U.S. Geological Survey, Information Services, Box 25286, Denver, CO 80225.

Information for ordering specific reports may be obtained from the Pennsylvania District Office at the address on the back of the title page or by phoning the Scientific and Technical Products Section at (717) 730-6940. Information on the availability of unpublished data or statistical analyses may be obtained from the District Information Specialist by telephone at (717) 730-6916 or by FAX at (717) 730-6997.

## COOPERATION

The U.S. Geological Survey (USGS) and organizations of the Commonwealth of Pennsylvania have had cooperative agreements for the systematic collection of surface-water records during the periods 1919-21 and 1931 to date, water-quality records from 1944 to date, and ground-water records from 1925 to date. Organizations that supplied data are acknowledged in station manuscripts. Organizations that assisted in collecting data for this report through cooperative agreements with the USGS are listed below.

The Commonwealth of Pennsylvania, Department of Environmental Protection, David E. Hess, Secretary, through the following:  
Office of Water Management, Lawrence C. Tropea, Jr., Deputy Secretary;  
    Bureau of Water Supply and Wastewater Management, Frederick Marrocco, Director;  
    Bureau of Watershed Management, Stuart I. Gansell, Director;  
    Bureau of Waterways Engineering, Michael Conway, Director;  
Office of Mineral Resources Management, Jeffrey D. Jarrett, Deputy Secretary;  
    Bureau of Mining and Reclamation, J. Scott Roberts, Director;  
Office of Management and Technical Services, Kenwood Giffhorn, Deputy Secretary;  
    Bureau of Laboratories, Roger H. Carlson, Director;  
Borough of Chambersburg, Robert P. Morris, Mayor;  
City of Sunbury Municipal Authority, Danny W. Ramer, General Manager;  
City of Williamsport, Michael Rafferty, Mayor;

### **COOPERATION--Continued**

Franklin County Watershed Association, Mark Dubin, Director;  
Letort Regional Authority, Brian Fischbach, Executive Director;  
Luzerne County Emergency Management Agency, Albert Bardar, Director;  
New Oxford Municipal Authority, Earl E. Mummert, Chairman;  
Roaring Spring Municipal Authority, Lisa Gates, Borough Manager;  
Susquehanna River Basin Commission, Paul O. Swartz, Executive Director;  
Town of Bloomsburg, Mary Lenvini Howe, Mayor;  
Union County Commissioners, W. Max Bossert, Chairman;  
University Area Joint Authority, Cory R. Miller, Executive Director.

Federal Energy Regulatory Commission Licensees:  
Susquehanna Electric Company.  
Safe Harbor Water Power Corporation.

The following Federal agencies assisted in the data-collection program by providing funds or services: Corps of Engineers, U.S. Army, Baltimore District; National Weather Service, NOAA, U.S. Department of Commerce.

The following organizations aided in collecting records: City of Lancaster, City of Lebanon, Hershey Chocolate U.S.A., Mechanicsburg Water Co., P.H. Glatfelter Co., Pennsylvania American Water Co., Pennsylvania Gas and Water Co., and York Water Co.

## SUMMARY OF HYDROLOGIC CONDITIONS

### Surface Water

The Susquehanna River flows generally southward from southern New York to the Chesapeake Bay in Maryland. At the point where the river enters Maryland, it drains 27,215 mi<sup>2</sup> (square miles). Most of this area, 20,962 mi<sup>2</sup>, is in north- and southcentral Pennsylvania. Streams in the basin are located in the Appalachian Plateau, Valley and Ridge, and Piedmont Physiographic Provinces. The underlying geology includes rocks of Precambrian to Triassic age.

### **Precipitation and Streamflow**

Data from 34 selected National Oceanic and Atmospheric Administration climatological sites, located within 5 climatic regions in the Susquehanna River Basin in Pennsylvania, indicated the annual precipitation for the Susquehanna River Basin in central Pennsylvania was normal. The greatest deficit basinwide, with an average of 1.04 inches below normal, occurred in October. The greatest surplus basinwide, with an average of 1.54 inches above normal, occurred in April. Basinwide, precipitation totals for the water year averaged 39.1 inches compared to the 1961-90 historical average of 39.5 inches.

As an example, the 2001 monthly and annual precipitation were compared with the 1961-90 mean monthly and annual precipitation recorded at Lancaster and Williamsport, Pennsylvania (fig. 1). The precipitation data are from the National Oceanic and Atmospheric Administration (U.S. Department of Commerce, 2000-2001) and National Weather Service records.

Two U.S. Geological Survey streamflow-gaging stations within the basin were selected as indicators of basinwide streamflow conditions. Figure 2 compares the 2001 water year monthly and annual mean streamflows with the median of the monthly and annual mean streamflows for 1961 through 1990 at the indicator sites. The 2001 water year annual mean streamflow was about 102 percent of the 1961-90 median of the mean annual streamflows in the West Branch Susquehanna River at Williamsport, and about 96 percent of the 1961-90 median of the mean annual streamflows in the Conestoga River at Lancaster.

Monthly mean streamflows did not exceed the normal range in the West Branch Susquehanna River or in the Conestoga River during the 2001 water year (fig. 2). Normal streamflows are defined as those between the 25th and 75th percentiles as compared to the monthly mean streamflows for 1961-90. Monthly mean streamflows were below normal in the West Branch Susquehanna River for the months of November, December, January, May, July, and August. In the Conestoga River, monthly mean streamflows were below normal for the months of November, May, July, August, and September during the 2001 water year (fig. 2).

Drought emergencies were not declared during the 2000 water year in the Susquehanna River Basin. The Governor of Pennsylvania made two Drought Declarations during the 2001 water year. The effects of sparse snowfall amounts and below-average precipitation totals for the period October 2000 through July 2001 culminated in the issuance of a drought watch on August 8, 2001 affecting 23 counties, all located in the Susquehanna River basin. Twenty-two additional counties were added to the drought watch state-wide on August 24, 2001. Only four counties in the Northeast portion of the Susquehanna River basin were unaffected by this declaration. The basin remained in a "drought watch" status (Pennsylvania Department of Environmental Protection, 2001) through September 30, 2001, the end of the 2001 water year.

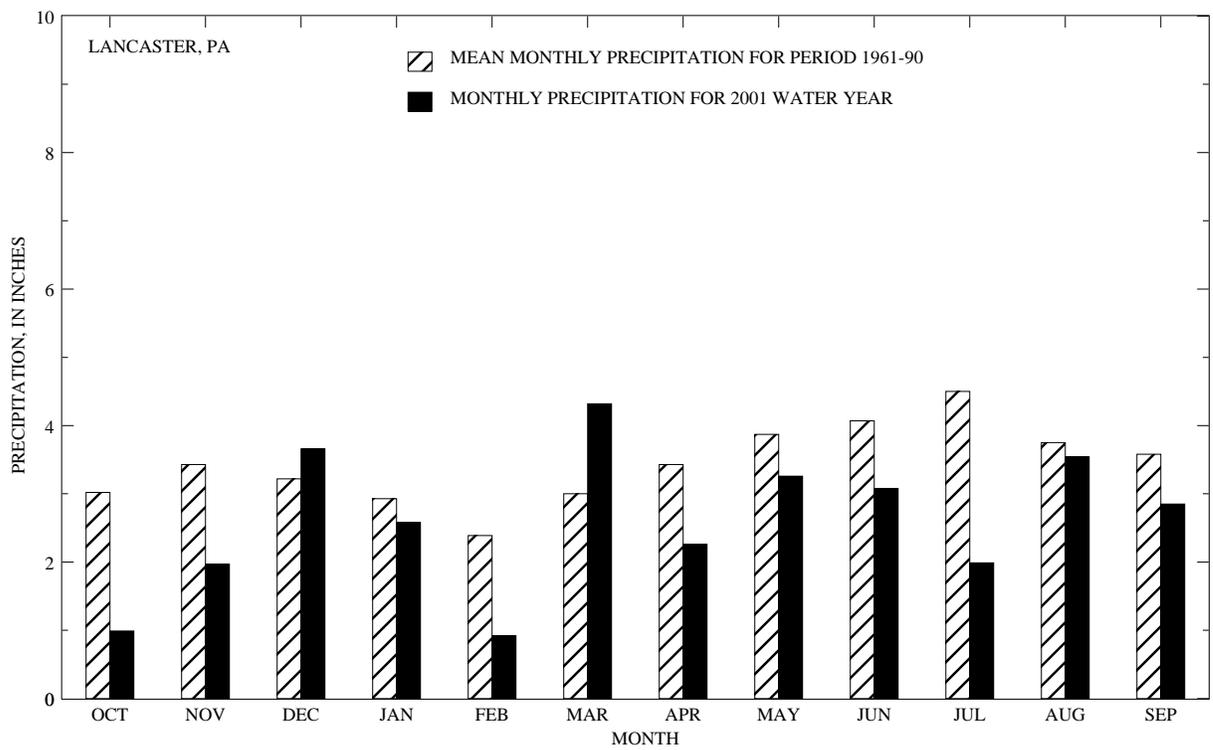
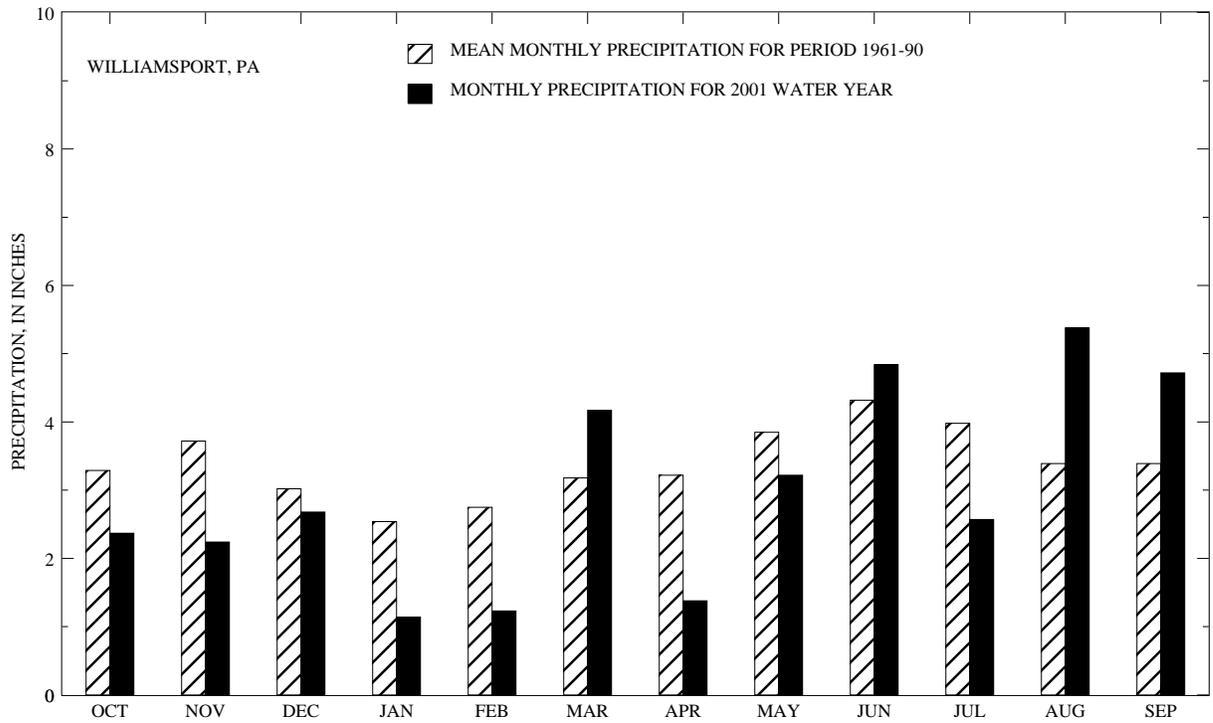


Figure 1.--Comparison of monthly precipitation at two National Oceanic and Atmospheric Administration climatological stations during the 2001 water year and mean monthly precipitation for the period 1961 through 1990.

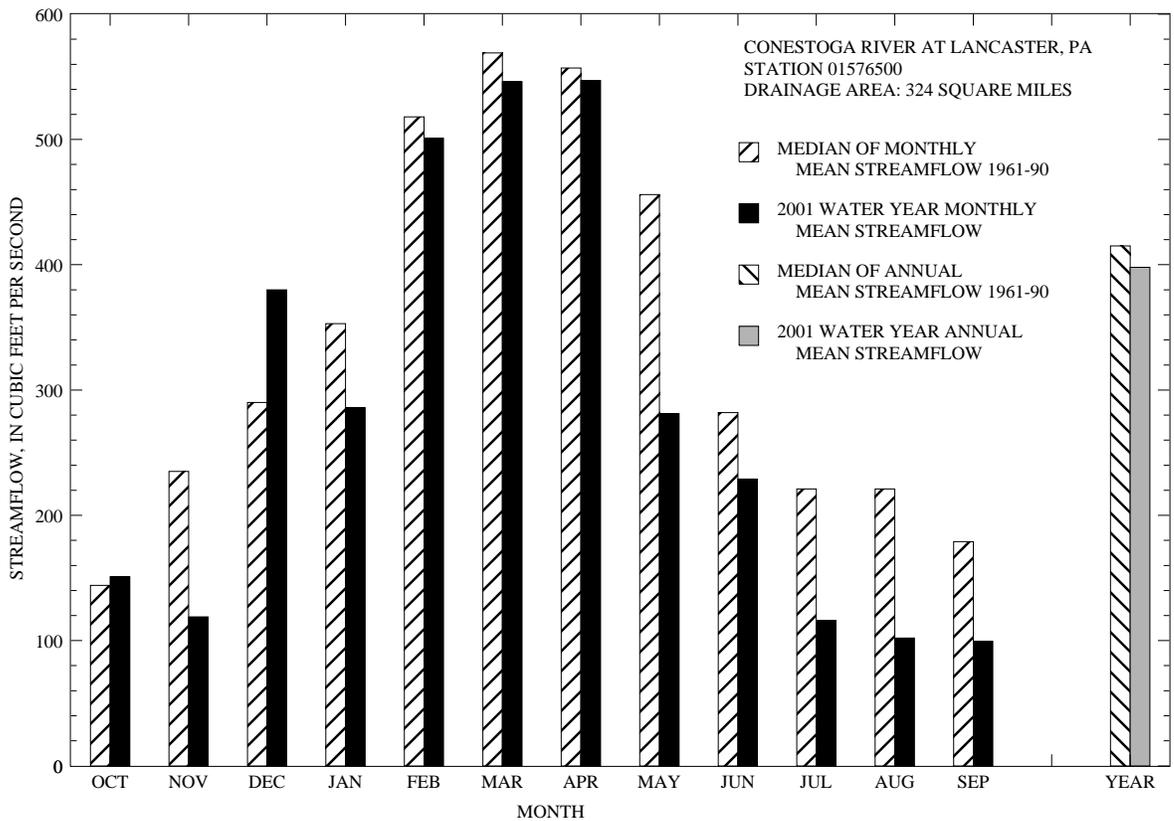
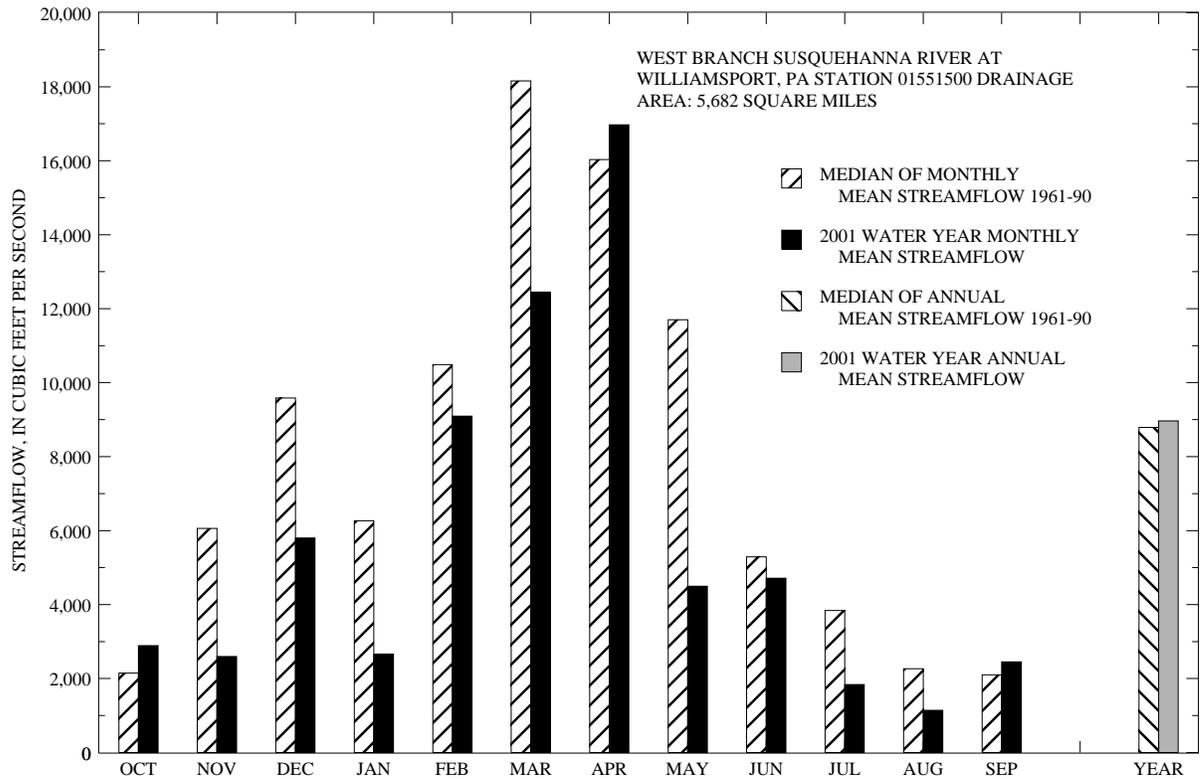


Figure 2.--Comparison of streamflow at two long-term streamflow-gaging stations during the 2001 water year and the median monthly and annual mean streamflow for the period 1961 through 1990.

### **Reservoirs**

The combined storage of 12 major reservoirs in the Susquehanna River Basin decreased slightly from 679,034 acre-feet (45.7 percent of total combined capacity) on September 30, 2000, to 656,531 acre-feet (44.2 percent of total combined capacity) on September 30, 2001. Maximum and minimum storage in individual reservoirs varied throughout the year depending on the purpose and capacity of each reservoir.

### **Ground Water**

Ground-water levels, which were generally at or above normal throughout all of the Susquehanna River basin at the end of the 2000 water year (Durlin and Schaffstall, 2001), had returned to normal levels during the fall season of the 2001 water year (October through December 2000). The water levels in 18 of the 22 observation wells were either normal or below normal at that time, and at least 15 wells maintained normal or below normal levels throughout the winter, spring and summer seasons as well. Ground-water levels during the water year generally reflected the seasonal precipitation variations (fig. 1). A comparison between ground-water levels for the 2001 water year and long-term seasonal ground-water levels is shown in figure 3.

### **References**

Durlin, R. R., and Schaffstall W. P., 2001, Water resources data, Pennsylvania, water year 2000: U.S. Geological Survey Water-Data Report PA-00-2, 458 p.

U.S. Department of Commerce, 2000-2001, Climatological Data for Pennsylvania, Volume 105-106: National Oceanic and Atmospheric Administration, National Environmental Satellite, Data, and Information Service.

Pennsylvania Department of Environmental Protection, 2001, Drought Information Center, accessed many times in 2001, at URL <http://www.dep.state.pa.us/dep/subject/hotopics/drought/drought.htm>

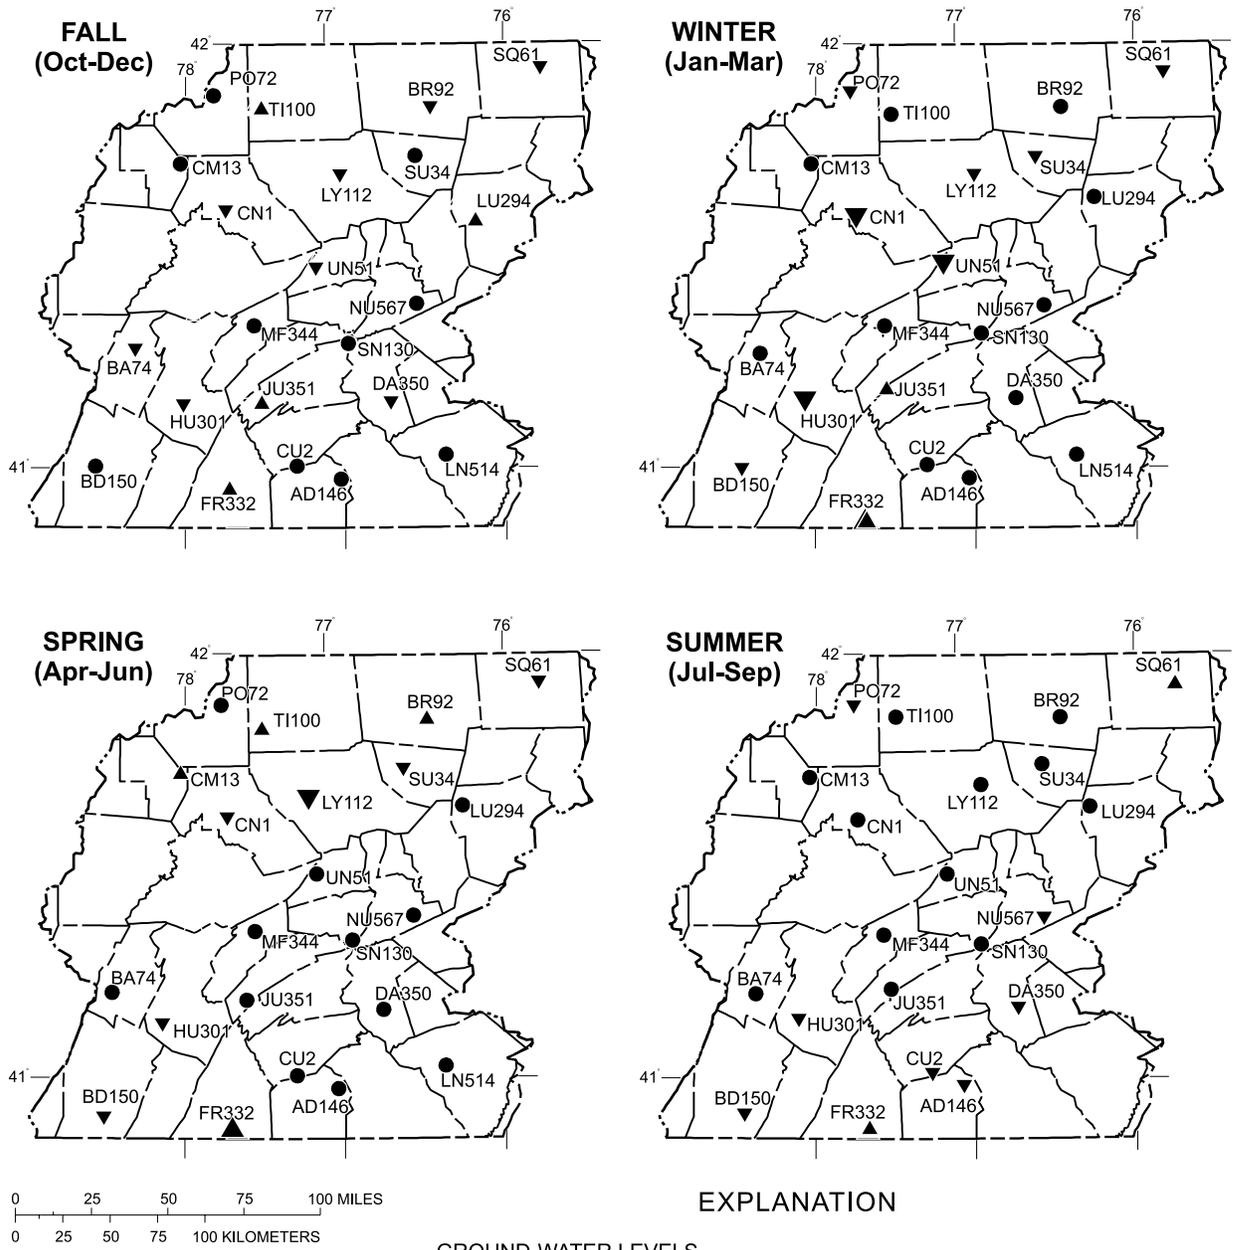


Figure 3.--Relation between 2001 seasonal ground-water levels and long-term ground-water levels [Seasonal percentile values were determined by ranking the average monthly water levels for each month in the season from highest to lowest for all years of record and averaging the ranks for the three months. A water level that is higher than the seasonal 10th percentile value would be expected to occur only once in a ten-year period. Conversely, a water level that is lower than the seasonal 90th percentile value also would be expected to occur only once during a ten-year period.]

## SPECIAL NETWORKS AND PROGRAMS

The **Hydrologic Bench-Mark Network** is a network of 50 sites in small drainage basins around the country whose purpose is to provide consistent data on the streamflow representative undeveloped watersheds nationwide, and to provide analyses on a continuing basis to compare and contrast conditions observed in basins more obviously affected by human activities. At 10 of these sites, water-quality information is being gathered on major ions and nutrients, primarily to assess the affects of acid deposition on stream chemistry. Additional information on the Hydrologic Benchmark Program can be found at [<http://water.usgs.gov/hbn/>].

The **National Stream-Quality Accounting Network** (NASQAN) monitors the water quality of large rivers within the Nation's largest river basins. From 1995 through 1999, a network of approximately 40 stations were operated in the Mississippi, Columbia, Colorado, and Rio Grande. From 2000 through 2004, sampling was reduced to a few index stations on the Colorado and Columbia so that a network of 5 stations could be implemented on the Yukon River. Samples are collected with sufficient frequency that the flux of a wide range of constituents can be estimated. The objective of NASQAN is to characterize the water quality of these large rivers by measuring concentration and mass transport of a wide range of dissolved and suspended constituents, including nutrients, major ions, dissolved and sediment-bound heavy metals, common pesticides, and inorganic and organic forms of carbon. This information will be used (1) to describe the long-term trends and changes in concentration and transport of these constituents; (2) to test findings of the National Water-Quality Assessment Program (NAWQA); (3) to characterize processes unique to large-river systems such as storage and re-mobilization of sediments and associated contaminants; and (4) to refine existing estimates of off-continent transport of water, sediment, and chemicals for assessing human effects on the world's oceans and for determining global cycles of carbon, nutrients, and other chemicals. Additional information about the NASQAN Program can be found at [<http://water.usgs.gov/nasqan/>].

The **National Atmospheric Deposition Program/National Trends Network** (NADP/NTN) provides continuous measurement and assessment of the chemical constituents in precipitation throughout the United States. As the lead federal agency, the USGS works together with over 100 organizations to provide a long-term, spatial and temporal record of atmospheric deposition generated from a network of 225 precipitation chemistry monitoring sites. This long-term, nationally consistent monitoring program, coupled with ecosystem research, provides critical information toward a national scorecard to evaluate the effectiveness of ongoing and future regulations intended to reduce atmospheric emissions and subsequent impacts to the Nation's land and water resources. Reports and other information on the NADP/NTN Program, as well as all data from the individual sites, can be found at [<http://bqs.usgs.gov/acidrain/>].

The **National Water-Quality Assessment** (NAWQA) Program of the U.S. Geological Survey is a long-term program with goals to describe the status and trends of water-quality conditions for a large, representative part of the Nation's ground- and surface-water resources; provide an improved understanding of the primary natural and human factors affecting these observed conditions and trends; and provide information that supports development and evaluation of management, regulatory, and monitoring decisions by other agencies.

Assessment activities are being conducted in 59 study units (major watersheds and aquifer systems) that represent a wide range of environmental settings nationwide and that account for a large percentage of the Nation's water use. A wide array of chemical constituents will be measured in ground water, surface water, streambed sediments, and fish tissues. The coordinated application of comparative hydrologic studies at a wide range of spatial and temporal scales will provide information for decision making by water-resources managers and a foundation for aggregation and comparison of findings to address water-quality issues of regional and national interest.

Communication and coordination between USGS personnel and other local, State, and federal interests are critical components of the NAWQA Program. Each study unit has a local liaison committee consisting of representatives from key federal, State, and local water-resources agencies, Indian nations, and universities in the study unit. Liaison committees typically meet semiannually to discuss their information needs, monitoring plans and progress, desired information products, and opportunities to collaborate efforts among the agencies. Additional information about the NAWQA Program can be found at [[http://water.usgs.gov/nawqa/nawqa\\_home.html](http://water.usgs.gov/nawqa/nawqa_home.html) ].

## EXPLANATION OF THE RECORDS

The surface-water and ground-water records in this report are for the 2001 water year that began October 1, 2000, and ended September 30, 2001. A calendar of the water year is provided on the inside of the front cover. The records contain streamflow data, stage and content data for lakes and reservoirs, water-quality data for streamflow stations, and ground-water-level data. The location of these stations and wells are shown in figures throughout the report. The following sections of the introductory text are presented to provide users with a more detailed explanation of how these hydrologic data published in this report were collected, analyzed, computed, and arranged for presentation.

### Station Identification Numbers

Each data station in this report, whether a streamsite or a well, is assigned a unique identification number. This number is unique in that it applies specifically to a given station and to no other. The number usually is assigned when a station is first established and is retained for that station indefinitely. The systems used by the U.S. Geological Survey to assign identification numbers for surface-water stations and for ground-water well sites differ, but both are based on geographic location. The "downstream order" system is used for regular surface-water stations and the "latitude-longitude" system is used for wells and, in Pennsylvania, for some miscellaneous surface-water sites where only random water-quality samples or discharge measurements are made.

### **Downstream-Order System**

Since October 1, 1950, the order of listing hydrologic-station records in Survey reports is in a downstream direction along the main stream. All stations on a tributary entering upstream from a main-stream station are listed before that station. A station on a tributary that enters between two main-stream stations is listed between them. A similar order is followed in listing stations on first rank, second rank, and other ranks of tributaries. The rank of any tributary on which a station is situated with respect to the stream to which it is immediately tributary is indicated by an indentation in a list of stations in the front of the report. Each indentation represents one rank. This downstream-order system of indentation shows which stations are on tributaries between any two stations and the rank of the tributary on which each station is situated.

The station-identification number is assigned in downstream order. In assigning station numbers, no distinction is made between partial-record stations and continuous-record stations; therefore, the station number for a partial-record station indicates downstream-order position in a list made up of both types of stations. Gaps are left in the series of numbers to allow for new stations that may be established; hence, the numbers are not consecutive. A station number can be from 8 to 15 digits in length and normally appears to the left of the station name. For example, an 8-digit number for a station such as 01570500, includes a 2-digit part number "01" plus a 6-digit downstream-order number "570500." The part number designates major river basins; for example, part "01" is the North Atlantic Slope Basin.

### **Latitude-Longitude System**

The identification numbers for wells and miscellaneous surface-water sites are assigned based on the grid system of latitude and longitude. The system provides the geographic location of the well or miscellaneous site and a unique number for each site. The number consists of 15 digits. The first six digits denote the degrees, minutes, and seconds of latitude, the next seven digits denote the degrees, minutes, and seconds of longitude, and the last two digits (assigned sequentially) identify the wells or other sites within a 1-second grid (fig. 4).

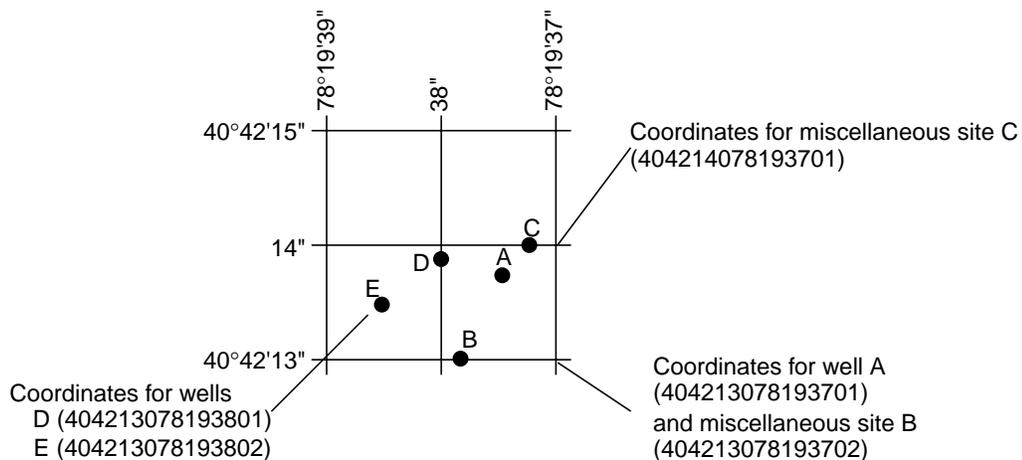


Figure 4.--System for numbering wells and miscellaneous sites (latitude and longitude).

A local well number is also assigned to the wells and consists of a 2-letter abbreviation of the county in which the well is located and a sequential number assigned at the time the well was scheduled.

## **Records of Stage and Water Discharge**

Records of stage and water discharge may be continuous or partial. Continuous records of discharge are those obtained using a continuous stage-recording device through which either instantaneous water discharges may be computed for any time, or mean discharges may be computed for any period of time, during the period of record. Because daily mean discharges or end-of-day contents for reservoirs commonly are published for such stations, they are referred to as "daily stations" or "continuous-record stations."

By contrast, partial records are obtained through discrete measurements without using a continuous stage-recording device and pertain only to a few flow characteristics, or perhaps only one. The nature of the partial record is indicated by table titles such as "*Crest-stage partial-record stations*," or "*Low-flow partial-record stations*." Records of miscellaneous discharge measurements or of measurements from special studies, such as low-flow seepage studies, may be considered as partial records, but they are presented separately in this report. Location of all continuous-record and partial-record stations for which data are given in this report are shown in figures 5-10.

## **Data Collection and Computation**

Those data obtained at a continuous-record gaging station on a stream consist of a continuous record of stage, individual measurements of discharge throughout a range of stages, and notations regarding factors that may affect the relation between stage and discharge. These data, together with supplemental information, such as weather records, are used to compute daily discharges. Continuous records of stage are obtained with analog recorders that trace continuous graphs of stage, with solid-state electronic data loggers, or with data collection platforms (DCPs) that electronically record and transmit the data via satellite to ground receiving stations. Measurements of discharge are made with current meters using methods adopted by the Geological Survey as a result of experience accumulated since 1880. These methods are described in standard textbooks, in Water-Supply Paper 2175, and the U.S. Geological Survey Techniques of Water-Resources Investigations (TWRIs), Book 3, Chapter A1 through A19 and Book 8, Chapters A2 and B2. The methods are consistent with the American Society for Testing and Materials (ASTM) standards and generally follow the standards of the International Organization for Standards (ISO).

In computing discharge records, results of individual measurements are plotted against the corresponding stages, and stage-discharge relation curves are then constructed. From these curves, rating tables indicating the approximate discharge for any stage within the range of the measurements are prepared. If it is necessary to define extremes of discharge outside the range of the current-meter measurements, the curves are extended using: (1) logarithmic plotting; (2) velocity-area studies; (3) results of indirect measurements of peak discharge, such as slope-area or contracted-opening measurements, and computations of flow-over-dams or weirs; or (4) step-backwater techniques.

Daily mean discharges are computed by applying each recorded stage value (gage height) to the stage-discharge curves or tables. If the stage-discharge relation is subject to change because of frequent or continual change in the physical features that form the control, the daily mean discharge is determined by the shifting-control method, in which correction factors based on the individual discharge measurements and notes of the personnel making the measurements are applied to the gage heights before the discharges are determined from the curves or tables. This shifting-control method also is used if the stage-discharge relation is changed temporarily because of aquatic growth or debris on the control. For some stations, formation of ice in the winter may so obscure the stage-discharge relation that daily mean discharges must be estimated from other information such as temperature and precipitation records, notes of observations, and records for other stations in the same or nearby basins for comparable periods.

At some stream-gaging stations, the stage-discharge relation is affected by the backwater from reservoirs, tributary streams, or other sources. This necessitates the use of the slope method in which the slope or fall in a reach of the stream is a factor in computing discharge. The slope or fall is obtained by means of an auxiliary gage set at some distance from the base gage. At some stations, the stage-discharge relation is affected by changing stage; at these stations, the rate of change in stage is used as a factor to compute discharge.

When computing records of lake or reservoir contents, it is necessary to have available from surveys, curves or tables defining the relation between stage and content. The application of stage to the stage-content curves or tables gives the contents from which daily, monthly, or yearly changes then are determined. If the stage-content relation changes because of deposition of sediment in the lake or reservoir, periodic surveys may be necessary to redefine the relation. Even when this is done, the contents computed may increase in error as the time elapsed since the last survey increases. Discharges over lake or reservoir spillways are computed from stage-discharge relation much as other stream discharges are computed.

For some gaging stations, there are periods when no gage-height data are collected or when the recorded gage height is so imprecise or incorrect that it cannot be used to compute daily mean discharge or end-of-day contents. This happens when the recorder stops or otherwise fails to operate properly, intakes are plugged, the float is frozen in the well, or for various other reasons. For such periods, the daily discharges are estimated from the recorded range in stage, previous or following record, discharge measurements, weather records, and comparison with other station records from the same or nearby basins. Likewise, daily contents may be estimated from operator's logs, previous or following record, inflow-outflow studies, and other information. Information explaining how estimated daily-discharge values are identified in station records is included in the next two sections, "*Data Presentation*" (REMARKS paragraph) and "*Identifying Estimated Daily Discharge*."

## Data Presentation

The records published for each continuous-record surface-water discharge station (gaging station) consist of four parts; (1) the manuscript or station description; (2) the data table of daily mean discharge values for the current water year with summary data; (3) a tabular statistical summary of monthly mean flow data for a designated period; and (4) a summary statistics table for a designated period that includes statistical data of annual, daily, and instantaneous flows as well as data pertaining to annual runoff, 7-day low-flow minimums, and flow duration.

### Station manuscript

For each continuous-record station, the manuscript provides, under various headings, descriptive information such as station location, period of record, historical extremes outside the period of record, record accuracy, and other remarks pertinent to station operation and regulation. The following comments, as appropriate, clarify information presented under the various headings of the station description.

**LOCATION.**--Information on locations is obtained from the most accurate maps available. The location of the gaging station with respect to the cultural and physical features in the vicinity and with respect to the reference place mentioned in the station name is given. River mileages, listed for only a few stations, were determined by methods given in "*River Mileage Measurement*," Bulletin 14, Revision of October 1968, prepared by the Water Resources Council or were provided by the U.S. Army Corps of Engineers.

**DRAINAGE AREA.**--Drainage areas are measured using the most accurate maps available. Because the type of maps available varies from one drainage basin to another, the accuracy of drainage areas likewise varies. Drainage areas are updated as better maps become available.

**PERIOD OF RECORD.**--This indicates the period for which records have been published for the station or for an equivalent station. An equivalent station is one that was in operation at a time that the present station was not and whose location was such that its streamflow can reasonably be considered equivalent to the streamflow at the present station.

**REVISED RECORDS.**--Because of new information, published records occasionally are found to be incorrect, and revisions are printed in later reports. Listed under this heading are all the reports in which revisions have been published for the station and the water years to which the revisions apply. If a revision did not include daily, monthly, or annual figures of discharge, that fact is noted after the year dates as follows; "(M)" means that only the instantaneous maximum discharge was revised; "(m)" that only the instantaneous minimum was revised; and "(P)" that only peak discharges were revised. If the drainage area has been revised, the report in which the most recently revised figure was first published is given.

**GAGE.**--The type of gage in current use, the datum of the current gage referred to sea level (see Definition of Terms), and a condensed history of the types, locations, and datums of previous gages are given under this heading.

**REMARKS.**--This paragraph is used to present information relative to the accuracy of the records, to special methods of computation, and to conditions that affect natural flow at the station. For reservoir stations, information is given on the dam forming the reservoir, the capacity, outlet works and spillway, and purpose and use of the reservoir.

**COOPERATION.**--Records provided by a cooperating organization or obtained for the U.S. Geological Survey by a cooperating organization are identified here.

**EXTREMES OUTSIDE PERIOD OF RECORD.**--Included here is information concerning major floods or unusually low flows that occurred outside the stated period of record. The information may or may not have been obtained by the U.S. Geological Survey.

**PEAK DISCHARGES FOR CURRENT YEAR.**--Peaks given here are similar to those found in the summary statistics table, except the peak discharge listing may include secondary peaks. For stations meeting certain criteria, all peak discharges and stages occurring during the water year and greater than a selected base discharge (see Definition of Terms) are presented under this heading. The peaks greater than the base discharge, excluding the highest one, are referred to as secondary peaks. Peak discharges are not published for streams for which the peaks are subject to substantial control by man. The time of occurrence for peaks is expressed in 24-hour local standard time. For example, 12:30 a.m. is 0030, and 1:30 p.m. is 1330.

**REVISIONS.**--If a critical error in published records is discovered, a revision is included in the first report published following discovery of the error.

Although rare, occasionally the records of a discontinued gaging station may need revision. Because, for these stations, there would be no current or, possibly, future station manuscript published to document the revision in a "*Revised Records*" entry, users of data for these stations who obtained the record from previously published data reports may wish to contact the District Office (address given on the back of the title page of this report) to determine if the published records were ever revised after the station was discontinued. Of course, if those data for a discontinued station were obtained by computer retrieval, these data would be current and accurate because published revisions of data are always accompanied by revisions of those data in computer storage.

Beginning with the 1991 annual State Data report, headings for AVERAGE DISCHARGE, EXTREMES FOR PERIOD OF RECORD, AND EXTREMES FOR CURRENT YEAR have been deleted and the information contained in these paragraphs, except for the listing of secondary instantaneous peak discharges in the PEAK DISCHARGES FOR CURRENT YEAR paragraph, is now presented in the tabular summaries following the discharge table or in the REMARKS paragraph, as appropriate. No changes have been made to the data presentations of lake contents.

#### **Data table of daily mean values**

The daily table of discharge records for stream-gaging stations gives mean discharge for each day of the water year. In the monthly summary for the table, the line headed "TOTAL" gives the sum of the daily figures for each month; the line headed "MEAN" gives the average flow in cubic feet per second for the month; and the lines headed "MAX" and "MIN" give the maximum and minimum daily mean discharges, respectively, for each month. Discharge for the month also is usually expressed in cubic feet per second per square mile (line headed "CFSM"); or in inches (line headed "IN."). Figures for cubic feet per second per square mile and runoff in inches may be omitted if there is extensive regulation or diversion or if the drainage area includes large noncontributing areas. At some stations streamflow is affected by regulation or diversion. The monthly adjusting figure for known regulation or diversion may be shown at the bottom of the daily values table or in the appropriate lake or reservoir table.

#### **Statistics of monthly mean data**

A tabular summary of the mean (line headed "MEAN"), maximum (line headed "MAX"), and minimum (line headed "MIN") of monthly mean flows for each month for a designated period is provided below the daily values table. The water years of the first occurrence of the maximum and minimum monthly flows are provided immediately below those figures. The designated period will be expressed as "FOR WATER YEARS \_\_\_\_-\_\_\_\_, BY WATER YEAR (WY)," and will list the first and last water years of the range of years selected from the PERIOD OF RECORD paragraph in the station manuscript. It will consist of all of the station record within the specified water years, inclusive, including complete months of record for partial water years, if any, and may coincide with the period of record for the station. The water years for which the statistics are computed will be consecutive, unless a break in the station record is indicated in the manuscript.

#### **Summary statistics**

A table titled "SUMMARY STATISTICS" follows the statistics of monthly mean data tabulation. This table consists of four columns, with the first column containing the line headings of the statistics being reported. The table provides a statistical summary of yearly, daily, and instantaneous flows, not only for the current water year but also for the previous calendar year and for a designated period, as appropriate. The designated period selected, "WATER YEARS \_\_\_\_-\_\_\_\_," will consist of all of the station record within the specified water years, inclusive, including complete months of record for partial water years, if any, and may coincide with the period of record for the station. The water years for which the statistics are computed will be consecutive, unless a break in the station record is indicated in the manuscript. All of the calculations for the statistical characteristics designated ANNUAL (See line headings below.), except for the "ANNUAL 7-DAY MINIMUM" statistic, are calculated for the designated period using complete water years. The other statistical characteristics may be calculated using partial water years.

The date or water year, as appropriate, of the first occurrence of each statistic reporting extreme values of discharge is provided adjacent to the statistic. Repeated occurrences may be noted in the REMARKS paragraph of the manuscript or in footnotes. Because the designated period for the statistics may not be the same as the period of record published in the manuscript, occasionally the dates of occurrence listed for the daily and instantaneous extremes may not be within the designated period. Selected streamflow duration statistics and runoff data are also given. Runoff data may be omitted if there is extensive regulation or diversion of flow in the drainage basin.

The summary statistics data, as appropriate, are provided with each continuous record of discharge. The following comments clarify information presented under the various line headings of the summary statistics table.

ANNUAL TOTAL.--The sum of the daily mean values of discharge for the year. At some stations the annual total discharge may be affected by reservoir storage or diversion. The monthly adjusting figures for known regulation or diversions may be shown 1) at the bottom of the daily values table, or 2) in the appropriate lake or reservoir table.

ANNUAL MEAN.--The arithmetic mean of the individual daily mean discharges for the year noted or for the designated period. At some stations the annual total discharge may be affected by reservoir storage or diversion. The monthly adjusting figures for known regulation or diversions may be shown 1) at the bottom of the daily values table, or 2) in the appropriate lake or reservoir table.

HIGHEST ANNUAL MEAN.--The maximum annual mean discharge occurring for the designated period.

LOWEST ANNUAL MEAN.--The minimum annual mean discharge occurring for the designated period.

HIGHEST DAILY MEAN.--The maximum daily mean discharge for the year or for the designated period.

LOWEST DAILY MEAN.--The minimum daily mean discharge for the year or for the designated period.

ANNUAL 7-DAY MINIMUM.--The lowest mean discharge for 7 consecutive days for a calendar year or a water year. Note that most low-flow frequency analyses of annual 7-day minimum flows use a climatic year (April 1 - March 31). The date shown in the summary statistics table is the initial date of the 7-day period. (This value should not be confused with the 7-day 10-year, low-flow statistic.)

MAXIMUM PEAK FLOW.--The maximum instantaneous peak discharge occurring for the water year or designated period. Occasionally the maximum flow for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak flow is given in the table and the maximum flow may be reported in a footnote or in the REMARKS paragraph in the manuscript.

MAXIMUM PEAK STAGE.--The maximum instantaneous peak stage occurring for the water year or designated period. Occasionally the maximum stage for a year may occur at midnight at the beginning or end of the year, on a recession from or rise toward a higher peak in the adjoining year. In this case, the maximum peak stage is given in the table and the maximum stage may be reported in the REMARKS paragraph in the manuscript or in a footnote. If the dates of occurrence of the maximum peak stage and maximum peak flow are different, the REMARKS paragraph in the manuscript or a footnote may be used to provide further information.

INSTANTANEOUS LOW FLOW.--The minimum instantaneous discharge occurring for the water year or for the designated period.

ANNUAL RUNOFF.--Indicates the total quantity of water in runoff for a drainage area for the year. Runoff figures may be omitted if there is extensive regulation or diversion. Data reports may use any of the following units of measurements in presenting annual runoff data:

Acre-foot (AC-FT) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equal to 43,560 cubic feet or about 326,000 gallons or 1,233 cubic meters.

Cubic feet per second per square mile (CFSM) is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area.

Inches (IN.,in.) indicates the depth to which the drainage area would be covered if all of the runoff for a given time period were uniformly distributed on it.

10 PERCENT EXCEEDS.--The discharge that has been exceeded 10 percent of the time for the designated period.

50 PERCENT EXCEEDS.--The discharge that has been exceeded 50 percent of the time for the designated period.

90 PERCENT EXCEEDS.--The discharge that has been exceeded 90 percent of the time for the designated period.

Data collected at partial-record stations follow the information for continuous-record sites. Data for partial-record discharge stations are presented in two tables. The first is a table of annual maximum stage and discharge at crest-stage stations, and the second is a table of discharge measurements at low-flow partial-record stations. The tables of partial-record stations are followed by a listing of discharge measurements made at sites other than continuous-record or partial-record stations. These measurements are generally made in times of drought or flood to give better areal coverage to those events. Those measurements and others collected for some special reason are called measurements at miscellaneous sites.

### **Identifying Estimated Daily Discharge**

Beginning with the 1987 annual State data report, estimated daily discharge values published in the water-discharge tables are identified by flagging individual daily values with the letter symbol "e" and printing a table footnote, "e Estimated".

### **Accuracy of the Records**

The accuracy of streamflow records depends primarily on (1) The stability of the stage-discharge relation or, if the control is unstable, the frequency of discharge measurements; and (2) the accuracy of measurements of stage, measurements of discharge, and interpretation of records.

The accuracy attributed to the records is indicated under "REMARKS." "*Excellent*" means that about 95 percent of the daily discharges are within 5 percent of their true values; "*good*," within 10 percent; and "*fair*," within 15 percent. Records that do not meet the criteria mentioned are rated "*poor*." Different accuracies may be attributed to different parts of a given record.

Daily mean discharges in this report are given to the nearest hundredth of a cubic foot per second for values less than 1 ft<sup>3</sup>/s (cubic foot per second); to the nearest tenth from 1.0 to 10 ft<sup>3</sup>/s; to whole numbers from 10 to 1,000 ft<sup>3</sup>/s; and to 3 significant figures when greater than 1,000 ft<sup>3</sup>/s. The number of significant figures used is based solely on the magnitude of the discharge value. The same rounding rules apply to discharges listed for partial-record stations and miscellaneous sites.

Discharge at many stations, as indicated by the monthly mean, may not reflect natural runoff due to the effects of diversion, consumption, regulation by storage, increase or decrease in evaporation due to artificial causes, or to other factors. For such stations, figures of cubic feet per second per square mile and of runoff, in inches, are not published unless satisfactory adjustments can be made for diversions, for changes in contents of reservoirs, or for other changes incident to use and control. Evaporation from a reservoir is not included in the adjustments for changes in reservoir contents, unless it is so stated. Even at those stations where adjustments are made, large errors in computed runoff may occur if adjustments or losses are large in comparison with the observed discharge.

### **Other Records Available**

Information of a more detailed nature than that published for most of the gaging stations such as observations of water temperature, discharge measurements, gage-height records, and rating tables is on file in the District's offices. Most gaging-station records are available in computer-usable form and many statistical analyses have been made.

Information on the availability of unpublished data or statistical analyses may be obtained from the District Information Specialist (telephone (717) 730-6916).

### **Records of Surface-Water Quality**

Records of surface-water quality ordinarily are obtained at or near stream-gaging stations because interpretation of records of surface-water quality nearly always requires corresponding discharge data. Records of surface-water quality in this report may involve a variety of types of data and measurement frequencies.

### **Classification of Records**

Water-quality data for surface-water sites are grouped into one of three classifications. A continuing-record station is a site where data are collected on a regularly scheduled basis. Specifically, a continuing record station is a site which meets one or all of the following conditions: (1) When chemical samples are collected daily or monthly for 10 or more months during the water year. (2) When water temperature records include observations taken one or more times daily. (3) When sediment discharge records include periods for which sediment loads are computed and are considered to be representative of the runoff for the water year. A partial-record station is a site where limited water-quality data are collected systematically over a period of years. Frequency of sampling is usually less than quarterly. A miscellaneous sampling site is a location other than a continuing or partial-record station, where random samples are collected to give better areal coverage to define water-quality conditions in the river basin.

A careful distinction needs to be made between "*continuing records*" as used in this report and "*continuous recordings*," which refers to a continuous graph or a series of discrete values recorded at short intervals. Some records of water quality, such as temperature and specific conductance, may be obtained through continuous recordings; however, because of costs, most data are obtained only monthly or less frequently. Location of stations for which records on the quality of surface water appear in this report are shown in figures 5, 6, 8, and 9.

### **Arrangement of Records**

Water-quality records collected at a surface-water daily record station are published immediately following that record, regardless of the frequency of sample collection. Station number and name are the same for both records. Where a surface-water daily record station is not available or where the water quality differs significantly from that at the nearby surface-water station, the continuing water-quality record is published with its own station number and name in the regular downstream-order sequence. Water-quality data for partial-record stations and for miscellaneous sampling sites appear in separate tables following the table of discharge measurements at miscellaneous sites.

## On-site Measurements and Sample Collection

During the collection of water-quality data, assurance that the data obtained represent the in-situ quality of the water is a major concern. Certain measurements, such as water temperature, pH, and dissolved oxygen, need to be made onsite when the samples are collected. To assure that measurements made in the laboratory also represent the in-situ water quality, carefully prescribed procedures need to be followed when collecting the samples, when treating the samples to prevent changes in quality pending analysis, and when shipping the samples to the laboratory. Procedures for on-site measurements and for collecting, treating, and shipping samples are given in publications on "Techniques of Water-Resources Investigations," Book 1, Chap. D2; Book 3, Chap. A1, A3, and A4; Book 9, Chap. A1-A9. These references are listed in the PUBLICATIONS ON TECHNIQUES OF WATER-RESOURCES INVESTIGATIONS section of this report. These methods are consistent with ASTM standards and generally follow ISO standards. Also, detailed information on collecting, treating, and shipping samples may be obtained from the U.S. Geological Survey District Office.

One sample can define adequately the water quality at a given time if the mixture of solutes throughout the stream cross section is homogeneous. However, the concentration of solutes at different locations in the cross section may vary widely with different rates of water discharge, depending on the source of material and the turbulence and mixing of the stream. Some streams must be sampled through several vertical sections to obtain a representative sample needed for an accurate mean concentration and for use in calculating load. All samples collected for the National Water Quality Assessment Program (see Definition of Terms) are obtained from several verticals. Whether samples are obtained from the centroid of flow or from several verticals, depends on flow conditions and other factors that must be evaluated by the collector.

Chemical-quality data published in this report are considered to be the most representative values available for the stations listed. The values reported represent water-quality conditions at the time of sampling as much as possible, consistent with available sampling techniques and methods of analysis. In the rare case where an apparent inconsistency exists between a reported pH value and the relative abundance of carbon dioxide species (carbonate and bicarbonate), the inconsistency is the result of a slight uptake of carbon dioxide from the air by the sample between measurement of pH in the field and determination of carbonate and bicarbonate in the laboratory.

For chemical-quality stations equipped with digital monitors, the published records consist of daily maximum, minimum, and mean values for each constituent measured and are determined from data that are recorded at 15-, 30-, or 60-minute intervals by solid-state electronic data loggers, or with Data Collection Platforms (DCPs). More detailed records (measured at a frequency greater than daily) may be obtained from the U.S. Geological Survey District Office at the address given on the back of the title page of this report or from [<http://water.usgs.gov/pa/nwis/>].

## Water Temperature

Water temperatures are measured at most of the water-quality stations. At stations where recording instruments are used, maximum, minimum, and mean temperatures for each day are published and recorded data are available from the District Office or from [<http://water.usgs.gov/pa/nwis/>]. In addition, water temperatures are measured at the time of discharge measurements for most water-discharge stations and are on file in the District's offices. For stations where water temperature is measured manually once or twice daily, it is usually measured at about the same time each day. Large streams have a small diurnal temperature change; temperatures in shallow streams may have a daily range of several degrees and may follow closely the changes in air temperature. Some streams may be affected by heated waste-water discharges.

## Sediment

Suspended-sediment concentrations are determined from samples collected by hand or by pump samplers. Hand samples utilize the appropriate sampler (dependent on stream depth and velocity) and are collected using the depth-integrating method at single or multiple verticals in the cross section. Samples collected by pump samplers use an intake set to a fixed location in the cross section. The intake is located at a site that best represents the entire cross section on the basis of simultaneous samples collected at various stages by the pumping sampler and by hand. During periods of rapidly changing flow or rapidly changing concentration, samples may have been collected more frequently (twice daily or, in some instances, every 15 minutes). The published sediment discharges for days of rapidly changing flow or concentration were computed by the subdivided-day method (time-discharge weighted average). Therefore, for those days when the published sediment discharge value differs from the value computed as the product of discharge, mean concentration, and the constant 0.0027, the reader can assume that the sediment discharge for that day was computed by the subdivided-day method. For periods when no samples were collected, daily discharges of suspended sediment were estimated on the basis of water discharge, sediment concentrations observed immediately before and after the periods, and suspended-sediment loads for other periods of similar discharge. Methods used in the computation of sediment records are described in the TWRI Book 3, Chapters C1 and C3. These methods are consistent with ASTM standards and generally follow ISO standards.

At other stations, suspended-sediment samples were collected periodically at many verticals in the stream cross section. Although data collected periodically may represent conditions only at the time of observations, such data are useful in establishing seasonal relations between quality and streamflow and in predicting long-term sediment-discharge characteristics of the stream.

In addition to the records of suspended-sediment discharge, records of the periodic measurements of the particle-size distribution of the suspended sediment and bed material are included for some stations.

## Laboratory Measurements

Sediment samples, samples for biochemical-oxygen demand (BOD), samples for indicator bacteria, and daily samples for specific conductance are analyzed locally. The remaining samples are analyzed in the Geological Survey laboratory in Denver, Colorado. If other laboratories are used, they are identified in the "Remarks" or "Cooperation" paragraph of each water-quality station manuscript. Methods used to analyze sediment samples and to compute sediment records are described in TWRI Book 5, Chapter C1. Methods used by the Geological Survey laboratories are given in the TWRI Book 1, Chapter D2; Book 3, Chapter C2; and Book 5, Chapters A1, A3, A4 and A5. These methods are consistent with ASTM standards and generally follow ISO standards. Methods used by other laboratories are approved by the U.S. Geological Survey, Water Resources Division.

## Data Presentation

For continuing-record stations, information pertinent to the history of station operation is provided in descriptive headings preceding the tabular data. These descriptive headings give details regarding location, drainage area, period of record, type of data available, instrumentation, general remarks, cooperation, and extremes for constituents currently measured daily. Tables of chemical, physical, biological, radiochemical, and other data, obtained at a frequency less than daily are presented first. Tables of "daily values" of specific conductance, pH, water temperature, dissolved oxygen, and suspended sediment then follow in sequence.

In the descriptive headings, if the location is identical to that of the streamflow-gaging station, neither the LOCATION nor the DRAINAGE AREA statements are repeated. The following information, as appropriate, is provided with each continuous-record station. Comments that follow clarify information presented under the various headings of the station description.

LOCATION.--See Data Presentation under "*Records of Stage and Water Discharge*"; same comments apply.

DRAINAGE AREA.--See Data Presentation under "*Records of Stage and Water Discharge*"; same comments apply.

PERIOD OF RECORD.--This indicates the periods for which there are published water-quality records for the station. The periods are shown separately for records of constituents measured daily or continuously and those measured less often than daily. For those measured daily or continuously, periods of record are given for the constituents individually.

INSTRUMENTATION.--Information on instrumentation is given only if a water-quality monitor, temperature recorder, pumping sampler, or other sampling device is in operation at a station.

REMARKS.--Remarks provide added information pertinent to the collection, analysis, or computation of the records.

COOPERATION.--Records provided by a cooperating organization or obtained for the Geological Survey by a cooperating organization are identified here.

EXTREMES.--Maximums and minimums are given only for constituents measured daily or more frequently. None are given for constituents measured less frequently, because the true maximums or minimums may not have been sampled. Extremes, when given, are provided for both the period of record and for the current water year.

REVISIONS.--If errors in published water-quality records are discovered after publication, appropriate updates are made in the U.S. Geological Survey's distributed data system, NWIS, and subsequently to its web-based National data system, NWISWeb [<http://water.usgs.gov/nwis/nwis>]. Because the usual volume of updates makes it impractical to document individual changes in the State data-report series or elsewhere, potential users of U.S. Geological Survey water-quality data are encouraged to obtain all required data from NWIS or NWISWeb to insure the most recent updates. Updates to NWISWeb are currently made on an annual basis.

The surface-water-quality records for partial-record stations and miscellaneous sampling sites are published in separate tables following the table of discharge measurements at miscellaneous sites. No descriptive statements are given for these records. Each station is published with its own station number and name in the regular downstream-order sequence.

## Accuracy of the Records

The accuracy of water-quality records at continuous-record water-quality stations depends primarily on (1) hydrologic environment; (2) seasonal conditions; (3) operating accuracy of the equipment; (4) fouling of the probes; (5) calibration drift in the equipment; and (6) maintenance frequency.

Beginning with the 2000 water year, an additional statement describing the accuracy attributed to the records is included under the "REMARKS" heading. After the record has been evaluated for reporting continuous data (table 1), one of the four accuracy classifications is applied to each measured physical property on a scale ranging from poor to excellent. Table 2 shows the criteria used in rating continuous water-quality records.

In addition, beginning with the 2000 water year, the presentation of daily mean pH values has been discontinued and replaced by median pH values. (Wagner, R.J., Mattraw, H.C., Ritz, G.F., and Smith, B.A., 2000, Guidelines and standard procedures for continuous water-quality monitors—site selection, field operation, calibration, record computation, and reporting: U.S. Geological Survey Water-Resources Investigations Report 00-4252, 53 p.).

Table 1.--Maximum allowable limits for continuous water-quality monitoring sensors.

Measured physical property	Maximum allowable limits for water-quality sensor values
Temperature	± 2.0°C
Specific conductance	± 30 percent
Dissolved oxygen	The greater of ± 2.0 mg/L or 20 percent
pH	± 2 pH units
Turbidity	± 30 percent

Table 2.--Rating continuous water-quality records.

Measured physical property	Ratings			
	Excellent	Good	Fair	Poor
Water temperature	≤ ± 0.2°C	>± 0.2 to 0.5°C	>± 0.5 to 0.8°C	>± 0.8°C
Specific conductance	≤ ± 3%	>± 3 to 10%	>± 10 to 15%	>± 15%
Dissolved oxygen	≤ ± 0.3 mg/L	>± 0.3 to 0.5 mg/L	>± 0.5 to 0.8 mg/L	>± 0.8 mg/L
pH	≤ ± 0.2 unit	>± 0.2 to 0.5 unit	>± 0.5 to 0.8 unit	>± 0.8 unit
Turbidity	≤ ± 5%	>± 5 to 10%	>± 10 to 15%	>± 15%

#### Remark Codes

The following remark codes may appear with the water-quality data in this report:

#### PRINTED OUTPUT

#### REMARK

E,e	Estimated value.
>	Actual value is known to be greater than the value shown.
<	Actual value is known to be less than the value shown.
K	Results based on colony count outside the acceptance range (non-ideal colony count).
L	Biological organism count less than 0.5 percent (organism may be observed rather than counted).
D	Biological organism count equal to or greater than 15 percent (dominant).
ND	Material specifically analyzed for but not detected.
V	Analyte was detected in both the environmental sample and the associated blanks.

## Dissolved Trace-Element Concentrations

NOTE.--Traditionally, dissolved trace-element concentrations have been reported at the microgram per liter ( $\mu\text{g/L}$ ) level. Recent evidence, mostly from large rivers, indicates that actual dissolved-phase concentrations for a number of trace elements are within the range of 10's to 100's of nanograms per liter ( $\text{ng/L}$ ). Data above the  $\mu\text{g/L}$  level should be viewed with caution. Such data may actually represent elevated environmental concentrations from natural or human causes; however, these data could reflect contamination introduced during sampling, processing, or analysis. To confidently produce dissolved trace-element data with insignificant contamination, the U.S. Geological Survey began using new trace-element protocols at some stations in water year 1994.

## Change in National Trends Network Procedures

NOTE.--Sample handling procedures at all National Trends Network stations were changed substantially on January 11, 1994, in order to reduce contamination from the sample shipping container. The data for samples before and after that date are different and not directly comparable. A tabular summary of the differences based on a special intercomparison study, is available from the NADP Program Office, Illinois State Water Survey, 2204 Griffith Drive, Champaign, IL 61820-7459 (217-333-7873).

## Water Quality-Control Data

Data generated from quality-control (QC) samples are a requisite for evaluating the quality of the sampling and processing techniques as well as data from the actual samples themselves. Without QC data, environmental sample data cannot be adequately interpreted because the errors associated with the sample data are unknown. The various types of QC samples collected by this district are described in the following section. Procedures have been established for the storage of water-quality-control data within the USGS. These procedures allow for storage of all derived QC data and are identified so that they can be related to corresponding environmental samples.

**BLANK SAMPLES.**--Blank samples are collected and analyzed to ensure that environmental samples have not been contaminated by the overall data-collection process. The blank solution used to develop specific types of blank samples is a solution that is free of the analytes of interest. Any measured value in a blank sample for an analyte (a specific component measured in a chemical analysis) that was absent in the blank solution is believed to be due to contamination. There are many types of blank samples possible, each designed to segregate a different part of the overall data-collection process. The types of blank samples collected in this district are:

**Ambient blank**--a blank solution that is put in the same type of sample container used for an environmental sample, kept with the set of sample bottles before sample collection, and opened at the site and exposed to the ambient conditions.

**Field blank**--a blank solution that is subjected to all aspects of sample collection, field processing, preservation, transportation, and laboratory handling as an environmental sample.

**Trip blank**--a blank solution that is put in the same type of sample container used for an environmental sample and kept with the set of samples bottles before and after sample collection.

**Equipment blank**--a blank solution that is processed through all equipment used for collecting and processing an environmental sample (similar to a field blank but normally done in the more controlled conditions of the office).

**Sampler blank**--a blank solution that is poured or pumped through the same field sampler used for collecting an environmental sample.

**Filter blank**--a blank solution that is filtered in the same manner and through the same filter apparatus used for an environmental sample.

**Splitter blank**--a blank solution that is mixed and separated using a field sample splitter in the same manner and through the same apparatus used for an environmental sample.

**Preservation blank**--a blank solution that is treated with the same preservatives used for an environmental sample.

**Canister blank**--a blank solution that is taken directly from a stainless steel canister just before the VOC sampler is submerged to obtain a field sample.

**REFERENCE SAMPLES.**--Reference material samples are solutions or materials having a known composition that is certified by a laboratory. Samples of reference material are submitted for analysis to ensure that an analytical method is accurate for the known properties of the reference material. Generally, the selected reference material properties are similar to the environmental sample properties.

**REPLICATE SAMPLES.**--Replicate samples are a set of environmental samples collected in a manner such that the samples are thought to be essentially identical in composition. Replicate is the general case for which a duplicate is the special case consisting of two samples. Replicate samples are collected and analyzed to establish the amount of variability in the data contributed by some part of the collection and analytical process. There are many types of replicate samples possible, each of which may yield slightly different results in a dynamic hydrologic setting, such as a flowing stream. The types of replicate samples collected in this district are:

Sequential samples--a type of replicate sample in which environmental samples are collected one after the other, typically within a short time.

Split sample--a type of replicate sample in which an environmental sample is split into subsamples contemporaneous in time and space.

**SPIKE SAMPLES.**--Spike samples are samples to which known quantities of a solution with one or more well-established analyte concentrations have been added. These samples are analyzed to determine the extent of matrix interference or degradation on the analyte concentration during sample processing and analysis.

### **Records of Ground-Water Levels**

Ground-water level data from an observation well network and from ground-water projects are published herein. Locations of observation wells in the basic network are shown in figures 5 and 7. Ground-water data are grouped by counties, arranged in alphabetical order, and are listed on pages x-xi. Those with an (l) following the well number have water-level data published in the report. Miscellaneous or short-term ground-water data collection projects are published following the basic network data.

### **Data Collection and Computation**

Water levels are measured in many types of wells under varying conditions, but the methods of measurement are standardized to the extent possible. The equipment and measuring techniques used at each observation well ensure that measurements at each well are of consistent accuracy and reliability.

The prime identification number for a given well is the 15-digit number that appears above the station description. The secondary identification number is the local well number, an alphanumeric number, derived from the county location of the well.

Water-level records are obtained from direct measurements with a steel tape, from the graph of a water-level recorder, with solid-state electronic data loggers, or with Data Collection Platforms (DCPs). The water-level measurements in this report are given in feet with reference to land-surface datum (lstd). Land-surface datum is a datum plane that is approximately at land surface at each well. If known, the elevation of the land-surface datum is given in the well description. The height of the measuring point (MP) above or below land-surface datum is given in each well description. Water levels for most wells, especially historical network wells, are reported in feet above or below land surface datum. For some short term project wells the water levels may be reported as elevation (feet above sea level) for convenience of the project work. Water levels are reported daily for all wells equipped with recording gages.

Water levels are reported to as many significant figures as can be justified by the local conditions. Accordingly, most measurements are reported to a hundredth of a foot, but some may be given to a tenth of a foot.

### **Data Presentation**

Each well record consists of three parts; (1) the station description, (2) the data table of water levels observed during the current water year, and (3) a graph of the water levels for the last 3 years. The description of the well is presented first through use of descriptive headings preceding the tabular data. The comments that follow clarify information presented under the various headings of the station description.

**LOCATION.**--This paragraph follows the well-identification number and reports the latitude and longitude (given in degrees, minutes, and seconds), the hydrologic-unit number, the distance and direction from a geographic point of reference, and the owner's name.

**AQUIFER.**--This entry designates by name (if a name exists) and geologic age the aquifer(s) open to the well.

**WELL CHARACTERISTICS.**--This entry describes the well in terms of depth, diameter, casing depth or screened interval, method of construction, use, and additional information such as casing breaks, collapsed screen, and other changes since construction.

**INSTRUMENTATION.**--This paragraph provides information on both the frequency of measurement and the collection method, allowing the user to better evaluate the reported water-levels by knowing whether they are based on hourly, daily, or some other frequency of measurement.

**DATUM.**--This entry describes both the measuring point and the land-surface elevation at the well. The measuring point is described physically (such as top of collar, notch in top of casing, plug in pump base and so on), and in relation to land surface (such as 1.3 ft above land-surface datum). The elevation of the land-surface datum is described in feet above (or below) sea level; it is reported with a precision relative to the method of determination.

**REMARKS.**--This entry describes factors that may influence the water level in a well or the measurement of the water level. It should identify wells that also are water-quality observation wells, and may be used to acknowledge the assistance of local (non-Survey) observers.

**PERIOD OF RECORD.**--This entry indicates the period for which there are published records for the well. It reports the month and year of the start of publication of water-level records by the U.S. Geological Survey and the words "*to current year*" if the records are to be continued into the following year. Periods for which water-level records are available, but are not published by the Geological Survey, may be noted.

**EXTREMES FOR PERIOD OF RECORD.**--This entry contains the highest and lowest values of one daily water-level statistic (maximum, mean, or instantaneous) reported in the data tables for the period of published record with respect to land-surface datum, (or occasionally sea level), and the dates of their occurrence. For example, if the daily maximum depth below land surface is reported in the table of water levels, this paragraph would reflect the highest and lowest of these daily maximum values for the period of record. Depending on the statistic reported in the table of water levels, extremes would be determined from daily maximum, mean, or instantaneous values.

**EXTREMES FOR CURRENT YEAR.**--This entry contains the instantaneous highest and lowest water level for the current year, with respect to land-surface datum, (or occasionally sea level), and the dates of their occurrence.

#### **Data table of water levels**

A table of water levels follows the station description for each well. These tables usually report water-level data as maximum depth (in feet) above or below land-surface datum, but may report daily mean or instantaneous values depending upon the method used to obtain the record and how the record was published in the past. If water-level record is obtained from electronic data loggers or DCPs, in addition to data published in the table of water levels, the daily maximum, minimum, and mean water-levels are stored in computer files and available from the District Office as noted in the REMARKS paragraph for that well. Recorded data are available at the District Office or at [<http://water.usgs.gov/pa/nwis/>]. Missing records are indicated by dashes in place of the water level. A hydrograph showing the last three years of water levels follows each water-level table.

#### **Records of Ground-Water Quality**

Records of ground-water quality are obtained at wells and springs included in ground-water projects. Records of ground-water quality in this report may involve a variety of types of data and measurement frequencies. Those wells with a (c) following the well number in the list of ground-water wells on page x, have water-quality data published in the report. Miscellaneous or short-term ground-water data collection projects are published following the basic network data.

#### **Data Collection and Computation**

The records of ground-water quality in this report are usually obtained as a part of special studies in specific areas. Consequently, a number of chemical analyses may be presented for some counties but none are presented for others. As a result, the records, by themselves, do not provide a balanced view of ground-water quality Statewide. Such a view can be attained only by considering records for a particular year in context with similar records obtained in previous years.

Most methods for collecting and analyzing water samples are described in the U.S. Geological Survey TWRI publications referred to in the "*On-site Measurements and Sample Collection*" and the "*Laboratory Measurements*" sections in this data report. In addition, the TWRI Book 1, Chapter D2, describes guidelines for the collection and field analysis of ground-water samples for selected unstable constituents. The values reported represent water-quality conditions at the time of sampling as much as possible, consistent with available sampling techniques and methods of analysis. These methods are consistent with ASTM standards and generally follow ISO standards. All samples were obtained by trained personnel. Any wells sampled were pumped long enough to assure that the water collected came directly from the aquifer and had not stood for a long time in the well casing where it would have been exposed to the atmosphere and to the material, possibly metal, comprising the casings.

### **Data Presentation**

Ground-water-quality data, if collected, are published with ground-water-level data at stations where level data are collected. Any data collected at partial-record stations and miscellaneous sites follow the information for continuous ground-water record stations. Data for each section are listed alphabetically by county, and are identified by well number. The prime identification number for wells sampled is the 15-digit number derived from the latitude-longitude locations. No descriptive statements are given for ground-water-quality records; however, the well number, depth of well, date of sampling, and other pertinent data are given in the table containing the chemical analyses of the ground water. The REMARK codes listed for surface-water-quality records are also applicable to ground-water-quality records.

### **ACCESS TO USGS WATER DATA**

The U.S. Geological Survey is the principal Federal water-data agency and, as such, collects and disseminates about 70 percent of the water data currently being used by numerous State, local, private, and other Federal agencies to develop and manage our water resources. The Geological Survey provides near real-time stream stage and discharge, groundwater well water level, and stream water-quality data for many of the stations equipped with the necessary telemetry and historic daily-mean and peak-flow discharge data for most current or discontinued gaging stations through the World Wide Web (WWW). These data may be accessed at [<http://water.usgs.gov/pa/nwis/>].

Water-quality and ground-water data also are available through the WWW at [<http://water.usgs.gov/pa/nwis/>]. In addition, data can be provided in various machine-readable formats on compact disc or 3-1/2 inch floppy disk. Information about the availability of specific types of data or products, and user charges, can be obtained locally from each of the Water Resources Division District Offices (See address on the back of the title page.)

For most streamgages, "real-time" streamflow conditions are available on the World Wide Web (WWW) Pennsylvania District Home Page at [<http://pa.water.usgs.gov/>]. Daily streamflow values for the period of record, annual peak stream discharges, and streamflow conditions for surrounding states may be obtained at [<http://water.usgs.gov/nwis/>].

A wide variety of additional information, such as ordering U.S. Geological Survey maps and publications is available at the U.S. Geological Survey Home Page at [<http://www.usgs.gov/>].

## DEFINITION OF TERMS

Terms related to streamflow, water-quality, and other hydrologic data, as used in this report, are defined below. See also table for converting English units to International System (SI) Units on the inside of the back cover.

**Acid neutralizing capacity** (ANC) is the equivalent sum of all bases or base-producing materials, solutes plus particulates, in an aqueous system that can be titrated with acid to an equivalence point. This term designates titration of an “unfiltered” sample (formerly reported as alkalinity).

**Acre-foot** (AC-FT, acre-ft) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equivalent to 43,560 cubic feet, 325,851 gallons, or 1,233 cubic meters.

**Adenosine triphosphate** (ATP) is an organic, phosphate-rich, compound important in the transfer of energy in organisms. Its central role in living cells makes it an excellent indicator of the presence of living material in water. A measurement of ATP therefore provides a sensitive and rapid estimate of biomass. ATP is reported in micrograms per liter.

**Algae** are mostly aquatic single-celled, colonial, or multicelled plants containing chlorophyll and lacking roots, stems, and leaves.

**Algal growth potential** (AGP) is the maximum algal dry weight biomass that can be produced in a natural water sample under standardized laboratory conditions. The growth potential is the algal biomass present at stationary phase and is expressed as milligrams dry weight of algae produced per liter of sample.

**Alkalinity** is the capacity of solutes in an aqueous system to neutralize acid. This term designates titration of a “filtered” sample.

**Annual runoff** is the total quantity of water in runoff for a drainage area for the year. Data reports may use any of the following units of measurement in presenting annual runoff data:

**Acre-foot** (AC-FT, acre-ft) is the quantity of water required to cover 1 acre to a depth of 1 foot and is equal to 43,560 cubic feet, 325,851 gallons, or 1,233 cubic meters

**Cubic foot per second per square mile** [CFSM, (ft<sup>3</sup>/s)/mi<sup>2</sup>] is the average number of cubic feet of water flowing per second from each square mile of area drained, assuming the runoff is distributed uniformly in time and area.

**Inch** (IN., in.) as used in this report, refers to the depth to which the drainage area would be covered with water if all of the runoff for a given time period were uniformly distributed on it.

**Aroclor** is the registered trademark for a group of polychlorinated biphenyls that were manufactured by the Monsanto Company prior to 1976. Aroclors are assigned specific 4-digit reference numbers dependent upon molecular type and degree of substitution of the biphenyl ring hydrogen atoms by chlorine atoms. The first two digits of a numbered aroclor represent the molecular type and the last two digits represent the weight percent of the hydrogen substituted chlorine.

**Bacteria** are microscopic unicellular organisms, typically spherical, rodlike, or spiral and threadlike in shape, often clumped into colonies. Some bacteria cause disease, while others perform an essential role in nature in the recycling of materials; for example, by decomposing organic matter into a form available for reuse by plants.

**Total coliform bacteria** are a particular group of bacteria that are used as indicators of possible sewage pollution. This group includes coliforms that inhabit the intestine of warm-blooded animals and those that inhabit soils. They are characterized as aerobic or facultative anaerobic, gram-negative, nonspore-forming, rod-shaped bacteria that ferment lactose with gas formation within 48 hours at 35 °C. In the laboratory, these bacteria are defined as all the organisms that produce colonies with a golden-green metallic sheen within 24 hours when incubated at 35 °C plus or minus 1.0 °C on M-Endo medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample.

**Fecal coliform bacteria** are bacteria that are present in the intestine or feces of warm-blooded animals. They are often used as indicators of the sanitary quality of the water. In the laboratory, they are defined as all organisms that produce blue colonies within 24 hours when incubated at 44.5 °C plus or minus 0.2 °C on M-FC medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample.

**Fecal streptococcal bacteria** are bacteria found in the intestine of warm-blooded animals. Their presence in water is considered to verify fecal pollution. They are characterized as gram-positive, cocci bacteria that are capable of growth in brain-heart infusion broth. In the laboratory, they are defined as all the organisms that produce red or pink colonies within 48 hours at 35 °C plus or minus 1.0 °C on KF-streptococcus medium (nutrient medium for bacterial growth). Their concentrations are expressed as number of colonies per 100 mL of sample.

**Enterococcus bacteria** are commonly found in the feces of humans and other warm-blooded animals. Although some strains are ubiquitous and not related to fecal pollution, the presence of enterococci in water is an indication of fecal pollution and the possible presence of enteric pathogens. Enterococcus bacteria are those bacteria that produce pink to red colonies with black or reddish-brown precipitate after incubation at 41 °C on mE agar and subsequent transfer to EIA medium. Enterococci include *Streptococcus faecalis*, *Streptococcus faecium*, *Streptococcus avium*, and their variants.

**Escherichia coli** (*E. coli*) are bacteria present in the intestine and feces of warm-blooded animals. *E. coli* are a member species of the fecal coliform group of indicator bacteria. In the laboratory, they are defined as those bacteria that produce yellow or yellow-brown colonies on a filter pad saturated with urea substrate broth after primary culturing for 22 to 24 hours at 44.5 °C on mTEC medium. Their concentrations are expressed as number of colonies per 100 mL of sample.

**Base flow** is flow in a channel sustained by ground-water discharge in the absence of direct runoff.

**Bed material** is the sediment mixture of which a streambed, lake, pond, reservoir, or estuary bottom is composed.

**Benthic organisms** (invertebrates) are the group of animals inhabiting the bottom of an aquatic environment. They include a number of types of organisms, such as bacteria, fungi, insect larvae and nymphs, snails, clams, and crayfish. They are useful as indicators of water quality.

**Biochemical oxygen demand** (BOD) is a measure of the quantity of dissolved oxygen, in milligrams per liter, necessary for the decomposition of organic matter by microorganisms, such as bacteria.

**Biomass** is the amount of living matter present at any given time, expressed as mass per unit area or volume of habitat.

**Ash mass** is the mass or amount of residue present after the residue from the dry mass determination has been ashed in a muffle furnace at a temperature of 500 °C for 1 hour. Ash mass of zooplankton and phytoplankton is expressed in grams per cubic meter ( $\text{g}/\text{m}^3$ ), and periphyton and benthic organisms in grams per square meter ( $\text{g}/\text{m}^2$ ).

**Dry mass** refers to the mass of residue present after drying in an oven at 105 °C for zooplankton and periphyton, until the mass remains unchanged. This mass represents the total organic matter, ash, and sediment in the sample. Dry mass is expressed in the same units as ash mass.

**Organic mass** or volatile mass of the living substance is the difference between the dry mass and ash mass and represents the actual mass of the living matter. Organic mass is expressed in the same units as for ash mass and dry mass.

**Wet mass** is the mass of living matter plus contained water.

**Biomass pigment ratio** is an indicator of the total proportion of periphyton which are autotrophic (plants). This is also called the Autotrophic Index.

**Bottom material:** See “Bed material.”

**Cells/volume** refers to the number of plankton cells or natural units counted using a microscope and grid or counting cell. Results are generally reported as cells or units per milliliter.

**Cells volume (biovolume)** determination is one of several common methods used to estimate biomass of algae in aquatic systems. Cell members of algae are frequently used in aquatic surveys as an indicator of algal production. However, cell numbers alone cannot represent true biomass because of considerable cell-size variation among the algal species. Cell volume ( $\mu\text{m}^3$ ) is determined by obtaining critical cell measurements on cell dimensions (for example, length, width, height, or radius) for 20 to 50 cells of each important species to obtain an average biovolume per cell. Cells are categorized according to the correspondence of their cellular shape to the nearest geometric solid or combinations of simple solids (for example, spheres, cones, or cylinders). Representative formulae used to compute biovolume are as follows:

sphere  $\frac{4}{3} \pi r^3$  cone  $\frac{1}{3} \pi r^2 h$  cylinder  $\pi r^2 h$ .

From cell volume, total algal biomass expressed as biovolume ( $\mu\text{m}^3/\text{mL}$ ) is thus determined by multiplying the number of cells of a given species by its average cell volume and then summing these volumes over all species.

**Chemical oxygen demand (COD)** is a measure of the chemically oxidizable material in the water and furnishes an approximation of the amount of organic and reducing material present. The determined value may correlate with BOD or with carbonaceous organic pollution from sewage or industrial wastes.

**Chlorophyll** refers to the green pigments of plants. Chlorophyll a and b are the two most common green pigments in plants.

**Colloid** is any substance with particles in such a fine state of subdivision dispersed in a medium (for example, water) that they do not settle out; but not in so fine a state of subdivision that they can be said to be truly dissolved.

**Color unit** is produced by 1 milligram per liter of platinum in the form of the chloroplatinate ion. Color is expressed in units of the platinum-cobalt scale.

**Confined aquifer** is a term used to describe an aquifer containing water between two relatively impermeable boundaries. The water level in a well tapping a confined aquifer stands above the top of the confined aquifer and can be higher or lower than the water table that may be present in the material above it. In some cases the water level can rise above the ground surface, yielding a flowing well.

**Contents** is the volume of water in a reservoir or lake. Unless otherwise indicated, volume is computed on the basis of a level pool and does not include bank storage.

**Continuous-record station** is a site that meets either of the following conditions:

1. Stage or streamflow are recorded at some interval on a continuous basis. The recording interval is usually 15 minutes, but may be less or more frequent.
2. Water-quality, sediment, or other hydrologic measurements are recorded at least daily.

**Control** designates a feature in the channel downstream from a gaging station that physically influences the water-surface elevation and thereby determines the stage-discharge relation at the station. This feature may be a constriction of the channel, a bedrock outcrop, a gravel bar, an artificial structure, or a uniform cross section over a long reach of the channel.

**Control structure** as used in this report is a structure on a stream or canal that is used to regulate the flow or stage of the stream or to prevent the intrusion of saltwater.

**Cubic foot per second (CFS,  $\text{ft}^3/\text{s}$ )** is the rate of discharge representing a volume of 1 cubic foot passing a given point in 1 second. It is equivalent to approximately 7.48 gallons per second, 448.8 gallons per minute, or 0.02832 cubic meters per second.

**Cubic foot per second-day (CFS-DAY, Cfs-day, [ $\text{ft}^3/\text{s}/\text{d}$ ])** is the volume of water represented by a flow of 1 cubic foot per second for 24 hours. It is equivalent to 86,400 cubic feet, 1.9835 acre-feet, 646,317 gallons, or 2,447 cubic meters.

**Daily record** is a summary of streamflow, sediment, or water-quality values computed from data collected with sufficient frequency to obtain reliable estimates of daily mean values.

**Daily record station** is a site for which daily records of streamflow, sediment, or water-quality values are computed.

**Datum**, as used in this report, is an elevation above mean sea level to which all gage height readings are referenced.

**Diel** is of or pertaining to a 24-hour period of time; a regular daily cycle.

**Discharge**, or flow, is the volume of water (or more broadly, volume of fluid including solid- and dissolved-phase material), that passes a given point in a given period of time.

**Annual 7-day minimum** is the lowest mean discharge for 7 consecutive days in a year. Note that most low-flow frequency analyses of annual 7-day minimum flows use a climatic year (April 1-March 31). The date shown in the summary statistics table is the initial date of the 7-day period. (This value should not be confused with the 7-day 10-year low-flow statistic.)

**Instantaneous discharge** is the discharge at a particular instant of time.

**Mean discharge** (MEAN) is the arithmetic mean of individual daily mean discharges during a specific period.

**Dissolved** refers to that material in a representative water sample that passes through a 0.45-micrometer membrane filter. This is a convenient operational definition used by Federal agencies that collect water data. Determinations of “dissolved” constituents are made on subsamples of the filtrate.

**Dissolved oxygen** (DO) content of water in equilibrium with air is a function of atmospheric pressure, temperature, and dissolved-solids concentration of the water. The ability of water to retain oxygen decreases with increasing temperature or dissolved solids, with small temperature changes having the more significant offset. Photosynthesis and respiration may cause diurnal variations in dissolved-oxygen concentration in water from some streams.

**Dissolved-solids concentration** of water is determined either analytically by the “residue-on-evaporation” method, or mathematically by totaling the concentrations of individual constituents reported in a comprehensive chemical analysis. During that analytical determination of dissolved solids, the bicarbonate (generally a major dissolved component of water) is converted to carbonate. Therefore, in the mathematical calculation of dissolved-solids concentration, the bicarbonate value, in milligrams per liter, is multiplied by 0.4926 to reflect the change. Alternatively, alkalinity concentration (as mg/L CaCO<sub>3</sub>) can be converted to carbonate concentration by multiplying by 0.60.

**Diversity index** is a numerical expression of evenness of distribution of aquatic organisms. The formula for diversity index is:

$$\bar{d} = - \sum_{i=1}^s \frac{n_i}{n} \log_2 \frac{n_i}{n}$$

where  $n_i$  is the number of individuals per taxon,  $n$  is the total number of individuals, and  $s$  is the total number of taxa in the sample of the community. Diversity index values range from zero, when all the organisms in the sample are the same, to some positive number, when some or all of the organisms in the sample are different.

**Drainage area** of a site on a stream is that area, measured in a horizontal plane, that has a common outlet at the site for its surface runoff. Figures of drainage area given herein include all closed basins, or noncontributing areas, within the area unless otherwise specified.

**Drainage basin** is a part of the Earth’s surface that is occupied by a drainage system with a common outlet for its surface runoff (see “Drainage area”).

**Dry weight** refers to the weight of animal tissue after it has been dried in an oven at 65 °C until a constant weight is achieved. Dry weight represents total organic and inorganic matter in the tissue.

**Flow-duration percentiles** are values on a scale of 100 that indicate the percentage of time for which a flow is not exceeded. For example, the 90th percentile of river flow is greater than or equal to 90 percent of all recorded flow rates.

**Gage datum** is the elevation of the zero point of the reference gage from which gage height is determined as compared to sea level (see “Datum”). This elevation is established by a system of levels from known benchmarks, by approximation from topographic maps, or by geographical positioning system.

**Gage height** (G.H.) is the water-surface elevation referenced to the gage datum. Gage height is often used interchangeably with the more general term “stage,” although gage height is more appropriate when used with a reading on a gage.

**Gaging station** is a site on a stream, canal, lake, or reservoir where systematic observations of stage, discharge, or other hydrologic data are obtained. When used in connection with a discharge record, the term is applied only to those gaging stations where a continuous record of discharge is computed.

**Gas chromatography/flame ionization detector** (GC/FID) is a laboratory analytical method used as a screening technique for semivolatile organic compounds that are extractable from water in methylene chloride.

**Ground-water level** is the elevation of the water table or another potentiometric surface at a particular location.

**Hardness** of water is a physical-chemical characteristic that is commonly recognized by the increased quantity of soap required to produce lather. It is attributable to the presence of alkaline earths (principally calcium and magnesium) and is expressed as the equivalent concentration of calcium carbonate (CaCO<sub>3</sub>).

**High tide** is the maximum height reached by each rising tide. The high-high and low-high tides are the higher and lower of the two high tides, respectively, of each tidal day. See NOAA web site:

<http://www.co-ops.nos.noaa.gov/tideglos.html>

**Hydrologic benchmark station** is one that provides hydrologic data for a basin in which the hydrologic regimen will likely be governed solely by natural conditions. Data collected at a benchmark station may be used to separate effects of natural from human-induced changes in other basins that have been developed and in which the physiography, climate, and geology are similar to those in the undeveloped benchmark basin.

**Hydrologic unit** is a geographic area representing part or all of a surface drainage basin or distinct hydrologic feature as defined by the former Office of Water Data Coordination and delineated on the State Hydrologic Unit Maps by the U.S. Geological Survey. Each hydrologic unit is identified by an 8-digit number.

**Land-surface datum** (lsd) is a datum plane that is approximately at land surface at each ground-water observation well.

**Light-attenuation coefficient**, also known as the extinction coefficient, is a measure of water clarity. Light is attenuated according to the Lambert-Beer equation

$$I = I_0 e^{-\lambda L} ,$$

where  $I_0$  is the source light intensity,  $I$  is the light intensity at length  $L$  (in meters) from the source,  $\lambda$  is the light-attenuation coefficient, and  $e$  is the base of the natural logarithm. The light attenuation coefficient is defined as

$$\lambda = -\frac{1}{L} \log_e \frac{I}{I_0} .$$

**Lipid** is any one of a family of compounds that are insoluble in water and that make up one of the principal components of living cells. Lipids include fats, oils, waxes, and steroids. Many environmental contaminants such as organochlorine pesticides are lipophilic.

**Low tide** is the minimum height reached by each falling tide. The high-low and low-low tides are the higher and lower of the two low tides, respectively, of each tidal day. *See NOAA web site:*

<http://www.co-ops.nos.noaa.gov/tideglos.html>

**Macrophytes** are the macroscopic plants in the aquatic environment. The most common macrophytes are the rooted vascular plants that are usually arranged in zones in aquatic ecosystems and restricted in the area by the extent of illumination through the water and sediment deposition along the shoreline.

**Measuring point (MP)** is an arbitrary permanent reference point from which the distance to water surface in a well is measured to obtain water level.

**Membrane filter** is a thin microporous material of specific pore size used to filter bacteria, algae, and other very small particles from water.

**Metamorphic stage** refers to the stage of development that an organism exhibits during its transformation from an immature form to an adult form. This developmental process exists for most insects, and the degree of difference from the immature stage to the adult form varies from relatively slight to pronounced, with many intermediates. Examples of metamorphic stages of insects are egg-larva-adult or egg-nymph-adult.

**Methylene blue active substances (MBAS)** are apparent detergents. The determination depends on the formation of a blue color when methylene blue dye reacts with synthetic anionic detergent compounds.

**Micrograms per gram (UG/G,  $\mu\text{g/g}$ )** is a unit expressing the concentration of a chemical constituent as the mass (micrograms) of the element per unit mass (gram) of material analyzed.

**Micrograms per kilogram (UG/KG,  $\mu\text{g/kg}$ )** is a unit expressing the concentration of a chemical constituent as the mass (micrograms) of the constituent per unit mass (kilogram) of the material analyzed. One microgram per kilogram is equivalent to 1 part per billion.

**Micrograms per liter (UG/L,  $\mu\text{g/L}$ )** is a unit expressing the concentration of chemical constituents in water as mass (micrograms) of constituent per unit volume (liter) of water. One thousand micrograms per liter is equivalent to 1 milligram per liter.

**Microsiemens per centimeter (US/CM,  $\mu\text{S/cm}$ )** is a unit expressing the amount of electrical conductivity of a solution as measured between opposite faces of a centimeter cube of solution at a specified temperature. Siemens is the International System of Units nomenclature. It is synonymous with mhos and is the reciprocal of resistance in ohms.

**Milligrams per liter (MG/L,  $\text{mg/L}$ )** is a unit for expressing the concentration of chemical constituents in water as the mass (milligrams) of constituent per unit volume (liter) of water. Concentration of suspended sediment also is expressed in  $\text{mg/L}$  and is based on the mass of dry sediment per liter of water-sediment mixture.

**Miscellaneous site**, or miscellaneous station, is a site where streamflow, sediment, and/or water-quality data are collected once, or more often on a random or discontinuous basis.

**Most probable number (MPN)** is an index of the number of coliform bacteria that, more probably than any other number, would give the results shown by the laboratory examination; it is not an actual enumeration. MPN is determined from the distribution of gas-positive cultures among multiple inoculated tubes.

**Multiple-plate samplers** are artificial substrates of known surface area used for obtaining benthic invertebrate samples. They consist of a series of spaced, hardboard plates on an eyebolt.

**Nanograms per liter (NG/L,  $\text{ng/L}$ )** is a unit expressing the concentration of chemical constituents in solution as mass (nanograms) of solute per unit volume (liter) of water. One million nanograms per liter is equivalent to 1 milligram per liter.

**National Geodetic Vertical Datum of 1929 (NGVD of 1929)** is a geodetic datum derived from a general adjustment of the first order level nets of the United States and Canada. It was formerly called "Sea Level Datum of 1929" or "mean sea level" in this series of reports. Although the datum was derived from the average sea level over a period of many years at 26 tide stations along the Atlantic, Gulf of Mexico, and Pacific Coasts, it does not necessarily represent local mean sea level at any particular place. *See NOAA web site: <http://www.ngs.noaa.gov/faq.shtml#WhatVD29VD88>*

**Nekton** are the consumers in the aquatic environment and consist of large free-swimming organisms that are capable of sustained, directed mobility.

**Nephelometric turbidity unit (NTU)** is the measurement for reporting turbidity that is based on use of a standard suspension of Formazin. Turbidity measured in NTU uses nephelometric methods that depend on passing specific light of a specific wavelength through the sample.

**Open or screened interval** is the length of unscreened opening or of well screen through which water enters a well, in feet below land surface.

**Organic carbon (OC)** is a measure of organic matter present in aqueous solution, suspension, or bottom sediments. May be reported as dissolved organic carbon (DOC), suspended organic carbon (SOC), or total organic carbon (TOC).

**Organism** is any living entity.

**Organism count/area** refers to the number of organisms collected and enumerated in a sample and adjusted to the number per area habitat, usually square meter (m<sup>2</sup>), acre, or hectare. Periphyton, benthic organisms, and macrophytes are expressed in these terms.

**Organism count/volume** refers to the number of organisms collected and enumerated in a sample and adjusted to the number per sample volume, usually milliliter (mL) or liter (L). Numbers of planktonic organisms can be expressed in these terms.

**Total organism count** is the total number of organisms collected and enumerated in any particular sample.

**Organochlorine compounds** are any chemicals that contain carbon and chlorine. Organochlorine compounds that are important in investigations of water, sediment, and biological quality include certain pesticides and industrial compounds.

**Parameter Code** is a 5-digit number used in the U.S. Geological Survey computerized data system, National Water Information System (NWIS), to uniquely identify a specific constituent or property.

**Partial-record station** is a site where discrete measurements of one or more hydrologic parameters are obtained over a period of time without continuous data being recorded or computed. A common example is a crest-stage gage partial-record station at which only peak stages and flows are recorded.

**Particle size** is the diameter, in millimeters (mm), of a particle determined by sieve or sedimentation methods. The sedimentation method utilizes the principle of Stokes Law to calculate sediment particle sizes. Sedimentation methods (pipet, bottom-withdrawal tube, visual-accumulation tube, Sedigraph) determine fall diameter of particles in either distilled water (chemically dispersed) or in native water (the river water at the time and point of sampling).

**Particle-size classification** used in this report agrees with the recommendation made by the American Geophysical Union Subcommittee on Sediment Terminology. The classification is as follows:

Classification	Size (mm)	Method of analysis
Clay	0.00024 - 0.004	Sedimentation
Silt	0.004 - 0.062	Sedimentation
Sand	0.062 - 2.0	Sedimentation/sieve
Gravel	2.0 - 64.0	Sieve

The particle-size distributions given in this report are not necessarily representative of all particles in transport in the stream. Most of the organic matter is removed, and the sample is subjected to mechanical and chemical dispersion before analysis in distilled water. Chemical dispersion is not used for native water analysis.

**Peak flow (peak stage)** is an instantaneous local maximum value in the continuous time series of stream flows or stages, preceded by a period of increasing values and followed by a period of decreasing values. There ordinarily are several peak values in a year. The maximum peak value in a year is called the annual peak; peaks lower than the annual peak are called secondary peaks. Occasionally the annual peak may not be the maximum value for the year: in such cases the maximum value occurs at midnight at the beginning or end of the year, on the recession from or rise toward a higher peak in the adjoining year. If values are recorded at a discrete series of times, the maximum recorded value may be taken as an approximation to the true peak, which may occur between the recording instants. If the values are recorded with finite precision, there may be a sequence of equal recorded values at the peak; in this case the first value is taken as the peak.

**Percent composition** or **percent of total** is a unit for expressing the ratio of a particular part of a sample or population to the total sample or population, in terms of types, numbers, weight, or volume.

**Periodic station** is a site where stage, discharge, sediment, chemical, or other hydrologic measurements are made one or more times during a year, but at a frequency insufficient to develop a daily record.

**Periphyton** is the assemblage of microorganisms attached to and living upon submerged solid surfaces. While primarily consisting of algae, they also include bacteria, fungi, protozoa, rotifers, and other small organisms. Periphyton are useful indicators of water quality.

**Pesticides** are chemical compounds used to control undesirable organisms. Major categories of pesticides include insecticides, miticides, fungicides, herbicides, and rodenticides.

**pH** of water is the negative logarithm of the hydrogen-ion activity. Solutions with pH less than 7 are termed "acidic," and solutions with a pH greater than 7 are termed "basic." Solutions with a pH of 7 are neutral. The presence and concentration of many dissolved chemical constituents found in water are, in part, influenced by the hydrogen-ion activity of water. Biological processes including growth, distribution of organisms, and toxicity of the water to organisms are also influenced, in part, by the hydrogen-ion activity of water.

**Picocurie** (PC, pCi) is one trillionth ( $1 \times 10^{-12}$ ) of the amount of radioactive nuclide represented by a curie (ci). A curie is the quantity of any radioactive nuclide that yields  $3.7 \times 10^{10}$  radioactive disintegrations per second (dps). A picocurie yields 0.037 dps, or 2.22 dpm (disintegrations per minute).

**Plankton** is the community of suspended, floating, or weakly swimming organisms that live in the open water of lakes and rivers. Concentrations are expressed as a number of cells per milliliter (cells/mL of sample).

**Phytoplankton** is the plant part of the plankton. They are usually microscopic, and their movement is subject to the water currents. Phytoplankton growth is dependent upon solar radiation and nutrient substances. Because they are able to incorporate as well as release materials to the surrounding water, the phytoplankton have a profound effect upon the quality of the water. They are the primary food producers in the aquatic environment and are commonly known as algae.

**Blue-green algae** (*Cyanophyta*) are a group of phytoplankton organisms having a blue pigment, in addition to the green pigment called chlorophyll. Blue-green algae often cause nuisance conditions in water.

**Diatoms** are the unicellular or colonial algae having a siliceous shell. Their concentrations are expressed as number of cells per milliliter (cells/mL) of sample.

**Euglenoids** (*Euglenophyta*) are a group of algae that are usually free-swimming and rarely creeping. They have the ability to grow either photosynthetically in the light or heterotrophically in the dark.

**Fire algae** (*Pyrrophyta*) are a group of algae that are free-swimming unicells characterized by a red pigment spot.

**Green algae** have chlorophyll pigments similar in color to those of higher green plants. Some forms produce algae mats or floating “moss” in lakes. Their concentrations are expressed as number of cells per milliliter (cells/mL) of sample.

**Zooplankton** is the animal part of the plankton. Zooplankton are capable of extensive movements within the water column and are often large enough to be seen with the unaided eye. Zooplankton are secondary consumers feeding upon bacteria, phytoplankton, and detritus. Because they are the grazers in the aquatic environment, the zooplankton are a vital part of the aquatic food web. The zooplankton community is dominated by small crustaceans and rotifers.

**Polychlorinated biphenyls** (PCB's) are industrial chemicals that are mixtures of chlorinated biphenyl compounds having various percentages of chlorine. They are similar in structure to organochlorine insecticides.

**Polychlorinated naphthalenes** (PCN's) are industrial chemicals that are mixtures of chlorinated naphthalene compounds. They have properties and applications similar to polychlorinated biphenyls (PCB's) and have been identified in commercial PCB preparations.

**Primary productivity** is a measure of the rate at which new organic matter is formed and accumulated through photosynthetic and chemosynthetic activity of producer organisms (chiefly, green plants). The rate of primary production is estimated by measuring the amount of oxygen released (oxygen method) or the amount of carbon assimilated (carbon method) by the plants.

**Primary productivity (carbon method)** is expressed as milligrams of carbon per area per unit time [ $\text{mg C}/(\text{m}^2/\text{time})$ ] for periphyton and macrophytes or per volume [ $\text{mg C}/(\text{m}^3/\text{time})$ ] for phytoplankton. Carbon method defines the amount of carbon dioxide consumed as measured by radioactive carbon (carbon-14). The carbon-14 method is of greater sensitivity than the oxygen light and dark bottle method and is preferred for use in unenriched waters. Unit time may be either the hour or day, depending on the incubation period.

**Primary productivity (oxygen method)** is expressed as milligrams of oxygen per area per unit time [ $\text{mg O}/(\text{m}^2/\text{time})$ ] for periphyton and macrophytes or per volume [ $\text{mg O}/(\text{m}^3/\text{time})$ ] for phytoplankton. Oxygen method defines production and respiration rates as estimated from changes in the measured dissolved-oxygen concentration. The oxygen light and dark bottle method is preferred if the rate of primary production is sufficient for accurate measurements to be made within 24 hours. Unit time may be either the hour or day, depending on the incubation period.

**Radioisotopes** are isotopic forms of an element that exhibit radioactivity. Isotopes are varieties of a chemical element that differ in atomic weight, but are very nearly alike in chemical properties. The difference arises because the atoms of the isotopic forms of an element differ in the number of neutrons in the nucleus; for example, ordinary chlorine is a mixture of isotopes having atomic weights of 35 and 37, and the natural mixture has an atomic weight of about 35.453. Many of the elements similarly exist as mixtures of isotopes, and a great many new isotopes have been produced in the operation of nuclear devices such as the cyclotron. There are 275 isotopes of the 81 stable elements, in addition to more than 800 radioactive isotopes.

**Recoverable from bottom material** is the amount of a given constituent that is in solution after a representative sample of bottom material has been digested by a method (usually using an acid or mixture of acids) that results in dissolution of readily soluble substances. Complete dissolution of all bottom material is not achieved by the digestion treatment and thus the determination represents less than the total amount (that is, less than 95 percent) of the constituent in the sample. To achieve comparability of analytical data, equivalent digestion procedures would be required of all laboratories performing such analyses because different digestion procedures are likely to produce different analytical results.

**Recurrence interval**, also referred to as return period, is the average time, usually expressed in years, between occurrences of hydrologic events of a specified type (such as exceedances of a specified high flow or non-exceedance of a specified low flow). The terms “return period” and “recurrence interval” do not imply regular cyclic occurrence. The actual times between occurrences vary randomly, with most of the times being less than the average and a few being substantially greater than the average. For example, the 100-year flood is the flow rate that is exceeded by the annual maximum peak flow at intervals whose average length is 100 years (that is, once in 100 years, on average); almost two-thirds of all exceedances of the 100-year flood occur less than 100 years after the previous exceedance, half occur less than 70 years after the previous exceedance, and about one-eighth occur more than 200 years after the previous exceedance. Similarly, the 7-day 10-year low flow ( $7Q_{10}$ ) is the flow rate below which the annual minimum 7-day-mean flow dips at intervals whose average length is 10 years (that is, once in 10 years, on average); almost two-thirds of the non-exceedances of the  $7Q_{10}$  occur less than 10 years after the previous non-exceedance, half occur less than 7 years after, and about one-eighth occur more than 20 years after the previous non-exceedance. The recurrence interval for annual events is the reciprocal of the annual probability of occurrence. Thus, the 100-year flood has a 1-percent chance of being exceeded by the maximum peak flow in any year, and there is a 10-percent chance in any year that the annual minimum 7-day-mean flow will be less than the  $7Q_{10}$ .

**Replicate samples** are a group of samples collected in a manner such that the samples are thought to be essentially identical in composition.

**River mile** is the distance of a point on a river measured in miles from the river's mouth along the low-water channel.

**River mileage** is the linear distance along the meandering path of a stream channel determined in accordance with Bulletin No. 14 (October 1968) of the Water Resources Council.

**Runoff in inches** (IN., in.) is the depth, in inches, to which the drainage area would be covered if all the runoff for a given time period were uniformly distributed on it.

**Sea level** refers to the National Geodetic Vertical Datum of 1929 (NGVD of 1929)—a geodetic datum derived from a general adjustment of the first-order level nets of the United States and Canada, formerly called Sea Level Datum of 1929. See: [http://www.co-ops.nos.noaa.gov/glossary/gloss\\_n.html#NGVD](http://www.co-ops.nos.noaa.gov/glossary/gloss_n.html#NGVD)

**Sediment** is solid material that is transported by, suspended in, or deposited from water. It originates mostly from disintegrated rocks; it also includes chemical and biochemical precipitates and decomposed organic material, such as humus. The quantity, characteristics, and cause of the occurrence of sediment in streams are influenced by environmental factors. Some major factors are degree of slope, length of slope, soil characteristics, land usage, and quantity and intensity of precipitation.

**Bed load** is the sediment that is transported in a stream by rolling, sliding, or skipping along or very close to the bed. In this report, bed load is considered to consist of particles in transit from the bed to an elevation equal to the top of the bed-load sampler nozzle (usually within 0.25 ft of the streambed).

**Bed-load discharge** (tons per day) is the quantity of sediment moving as bed load, reported as dry weight, that passes a cross section in a given time.

**Suspended sediment** is the sediment that is maintained in suspension by the upward components of turbulent currents or that exists in suspension as a colloid.

**Suspended-sediment concentration** is the velocity-weighted concentration of suspended sediment in the sampled zone (from the water surface to a point approximately 0.3 ft above the bed) expressed as milligrams of dry sediment per liter of water-sediment mixture (mg/L). The entire sample is used for the analysis.

**Mean concentration of suspended sediment** is the time-weighted concentration of suspended sediment passing a stream section during a 24-hour day.

**Suspended-sediment discharge** (tons/day) is the quantity of sediment moving in suspension, reported as dry weight, that passes a cross section in a given time. It is calculated in units of tons per day as follows: concentration (mg/L) x discharge (ft<sup>3</sup>/s) x 0.0027.

**Suspended-sediment load** is a term that refers to material in suspension. The term needs to be qualified, such as “annual suspended-sediment load” or “sand-size suspended-sediment load,” and so on. It is not synonymous with either suspended-sediment discharge or concentration.

**Total sediment discharge** (tons/day) is the sum of the suspended-sediment discharge and the bed-load discharge. It is the total quantity of sediment, reported as dry weight, that passes a cross section in a given time.

**Total sediment load** or total load is a term that refers to the total sediment (bed load plus suspended-sediment load) that is in transport. The term needs to be qualified, such as “annual suspended-sediment load” or “sand-size suspended-sediment load,” and so on. It is not synonymous with total sediment discharge.

**Seven-day 10-year low flow** (7Q<sub>10</sub>, 7Q<sub>10</sub>) is the minimum flow averaged over 7 consecutive days that is expected to occur on average, once in any 10-year period. The 7Q<sub>10</sub> has a 10-percent chance of occurring in any given year.

**Sodium adsorption ratio** (SAR) is the expression of relative activity of sodium ions in exchange reactions within soil and is an index of sodium or alkali hazard to the soil. Waters range in respect to sodium hazard from those which can be used for irrigation on almost all soils to those which are generally unsatisfactory for irrigation.

**Solute** is any substance that is dissolved in water.

**Specific conductance** is a measure of the ability of a water to conduct an electrical current. It is expressed in microsiemens per centimeter at 25 °C. Specific conductance is related to the type and concentration of ions in solution and can be used for approximating the dissolved-solids content of the water. Commonly, the concentration of dissolved solids (in milligrams per liter) is from 55 to 75 percent of the specific conductance (in microsiemens). This relation is not constant from stream to stream, and it may vary in the same source with changes in the composition of the water.

**Stable isotope ratio** (per MILL/MIL) is a unit expressing the ratio of the abundance of two radioactive isotopes. Isotope ratios are used in hydrologic studies to determine the age or source of specific waters, to evaluate mixing of different waters, as an aid in determining reaction rates, and other chemical or hydrologic processes.

**Stage:** See “Gage height.”

**Stage-discharge relation** is the relation between the water-surface elevation, termed stage (gage height), and the volume of water flowing in a channel per unit time.

**Streamflow** is the discharge that occurs in a natural channel. Although the term “discharge” can be applied to the flow of a canal, the word “streamflow” uniquely describes the discharge in a surface stream course. The term “streamflow” is more general than “runoff” as streamflow may be applied to discharge whether or not it is affected by diversion or regulation.

**Substrate** is the physical surface upon which an organism lives.

**Artificial substrate** is a device which is purposely placed in a stream or lake for colonization of organisms. The artificial substrate simplifies the community structure by standardizing the substrate from which each sample is taken. Examples of artificial substrates are basket samplers (made of wire cages filled with clean streamside rocks) and multiplate samplers (made of hardboard) for benthic organism collection, and plexiglass strips for periphyton collection.

**Natural substrate** refers to any naturally occurring immersed or submersed solid surface, such as a rock or tree, upon which an organism lives.

**Surface area** of a lake or impoundment is that area encompassed by the boundary of the lake or impoundment as shown on USGS topographic maps, or on other available maps or photographs. The computed surface areas reflect the water levels of the lakes or impoundments at the times when the information for the maps or photographs was obtained.

**Surficial bed material** is the top 0.1 to 0.2 ft of the bed material that is sampled using U.S. Series Bed-Material Samplers.

**Suspended** (as used in tables of chemical analyses) refers to the amount (concentration) of undissolved material in a water-sediment mixture. It is associated with the material retained on a 0.45-micrometer filter.

**Suspended, recoverable** is the amount of a given constituent that is in solution after the part of a representative suspended-sediment sample that is retained on a 0.45-micrometer membrane filter has been digested by a method (usually using a dilute acid solution) that results in dissolution of only readily soluble substances. Complete dissolution of all the particulate matter is not achieved by the digestion treatment and thus the determination represents something less than the “total” amount (that is, less than 95 percent) of the constituent present in the sample. To achieve comparability of analytical data, equivalent digestion procedures are required of all laboratories performing such analyses because different digestion procedures are likely to produce different analytical results.

Determinations of “suspended, recoverable” constituents are made either by analyzing portions of the material collected on the filter or, more commonly, by difference, based on determinations of (1) dissolved and (2) total recoverable concentrations of the constituent.

**Suspended, total** is the total amount of a given constituent in the part of a representative suspended-sediment sample that is retained on a 0.45-micrometer membrane filter. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent determined. Knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to determine when the results should be reported as “suspended, total.”

Determinations of “suspended, total” constituents are made either by analyzing portions of the material collected on the filter or, more commonly, by difference, based on determinations of (1) dissolved and (2) total concentrations of the constituent.

**Synoptic Studies** are short-term investigations of specific water-quality conditions during selected seasonal or hydrologic periods to provide improved spatial resolution for critical water-quality conditions. For the period and conditions sampled, they assess the spatial distribution of selected water-quality conditions in relation to causative factors, such as land use and contaminant sources.

**Taxonomy** is the division of biology concerned with the classification and naming of organisms. The classification of organisms is based upon a hierarchical scheme beginning with Kingdom and ending with Species at the base. The higher the classification level, the fewer features the organisms have in common. For example, the taxonomy of a particular mayfly, *Hexagenia limbata*, is the following:

Kingdom	Animal
Phylum	Arthropoda
Class	Insecta
Order	Ephemeroptera
Family	Ephemeridae
Genus	<i>Hexagenia</i>
Species	<i>Hexagenia limbata</i>

**Time-weighted average** is computed by multiplying the number of days in the sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the total number of days. A time-weighted average represents the composition of water that would be contained in a vessel or reservoir that had received equal quantities of water from the stream each day for the year.

**Tons per acre-foot** is the dry mass of dissolved solids in 1 acre-foot of water. It is computed by multiplying the concentration of the constituent, in milligrams per liter, by 0.00136.

**Tons per day** (T/DAY, tons/d) is the rate representing a mass of 1 ton of a constituent in streamflow passing a cross section in 1 day. It is equivalent to 2,000 pounds per day, or 0.9072 metric tons per day.

**Total** is the total amount of a given constituent in a representative suspended-sediment sample, regardless of the constituent’s physical or chemical form. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent present in both the dissolved and suspended phases of the sample. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to judge when the results should be reported as “total.” (Note that the word “total” does double duty here, indicating both that the sample consists of a suspended-sediment mixture and that the analytical method determined all of the constituent in the sample.)

**Total discharge** is the quantity of a given constituent, measured as dry mass or volume, that passes a stream cross section per unit of time. When referring to constituents other than water, this term needs to be qualified, such as “total sediment discharge,” “total chloride discharge,” and so on.

**Total in bottom material** is the total amount of a given constituent in a representative sample of bottom material. This term is used only when the analytical procedure assures measurement of at least 95 percent of the constituent determined. A knowledge of the expected form of the constituent in the sample, as well as the analytical methodology used, is required to judge when the results should be reported as “total in bottom material.”

**Total length** (fish) is the straight-line distance from the anterior point of a fish specimen’s snout, with the mouth closed, to the posterior end of the caudal (tail) fin, with the lobes of the caudal fin squeezed together.

**Total load** refers to all of a constituent in transport. When referring to sediment, it includes suspended load plus bed load.

**Total recoverable** is the amount of a given constituent that is in solution after a representative suspended-sediment sample has been digested by a method (usually using a dilute acid solution) that results in dissolution of only readily soluble substances. Complete dissolution of all particulate matter is not achieved by the digestion treatment, and thus the determination represents something less than the “total” amount (that is, less than 95 percent) of the constituent present in the dissolved and suspended phases of the sample. To achieve comparability of analytical data, equivalent digestion procedures are required of all laboratories performing such analyses because different digestion procedures are likely to produce different analytical results.

**Turbidity** is a measurement of the collective optical properties of a water sample that cause light to be scattered and absorbed rather than transmitted in straight lines; the higher the intensity of scattered light, the higher the turbidity. Turbidity is expressed in nephelometric turbidity units (NTU) or Formazin turbidity units (FTU) depending on the method and equipment used.

**Ultraviolet (UV) absorbance (absorption)** at 254 or 280 nanometers is a measure of the aggregate concentration of the mixture of UV absorbing organic materials dissolved in the analyzed water, such as lignin, tannin, humic substances, and various aromatic compounds. UV absorbance (absorption) at 254 or 280 nanometers is measured in UV absorption units per centimeter of pathlength of UV light through a sample.

**Volatile organic compounds (VOC's)** are organic compounds that can be isolated from the water phase of a sample by purging the water sample with inert gas, such as helium, and subsequently analyzed by gas chromatography. Many VOC's are manmade chemicals that are used and produced in the manufacture of paints, adhesives, petroleum products, pharmaceuticals, and refrigerants. They are often components of fuels, solvents, hydraulic fluids, paint thinners, and dry cleaning agents commonly used in urban settings. VOC contamination of drinking-water supplies is a human health concern because many are toxic and are known or suspected human carcinogens (U.S. Environmental Protection Agency, 1996).

**Water level** is the water-surface elevation or stage of the free surface of a body of water above or below any datum (see "Gage height"), or the surface of water standing in a well, usually indicative of the position of the water table or other potentiometric surface.

**Water table** is the surface of a ground-water body at which the water is at atmospheric pressure.

**Water-table aquifer** is an unconfined aquifer within which is found the water table.

**Water year** in U.S. Geological Survey reports dealing with surface-water supply is the 12-month period October 1 through September 30. The water year is designated by the calendar year in which it ends and which includes 9 of the 12 months. Thus, the year ending September 30, 2001, is called the "2001 water year."

**WDR** is used as an abbreviation for "Water-Data Report" in the REVISED RECORDS paragraph to refer to State annual hydrologic-data reports. (WRD was used as an abbreviation for "Water-Resources Data" in reports published prior to 1976.)

**Weighted average** is used in this report to indicate discharge-weighted average. It is computed by multiplying the discharge for a sampling period by the concentrations of individual constituents for the corresponding period and dividing the sum of the products by the sum of the discharges. A discharge-weighted average approximates the composition of water that would be found in a reservoir containing all the water passing a given location during the water year after thorough mixing in the reservoir.

**Well** is an excavation (pit, hole, tunnel), generally cylindrical in form and often walled in, drilled, dug, driven, bored, or jetted into the ground to such a depth as to penetrate water-yielding geologic material and allow the water to flow or to be pumped to the surface.

**Wet weight** refers to the weight of animal tissue or other substance including its contained water.

**WSP** is used as an abbreviation for "Water-Supply Paper" in reference to previously published reports

## TECHNIQUES OF WATER-RESOURCES INVESTIGATIONS OF THE U.S. GEOLOGICAL SURVEY

The U.S.G.S. publishes a series of manuals describing procedures for planning and conducting specialized work in water-resources investigations. The material is grouped under major subject headings called books and is further divided into sections and chapters. For example, section A of book 3 (Applications of Hydraulics) pertains to surface water. The chapter, the unit of publication, is limited to a narrow field of subject matter. This format permits flexibility in revision and publication as the need arises.

The reports listed below are for sale by the U.S.G.S., Information Services, Box 25286, Federal Center, Denver, Colorado 80225 (authorized agent of the Superintendent of Documents, Government Printing Office). Prepayment is required. Remittance should be made in the form of a check or money order payable to the "U.S. Geological Survey." Prices are not included because they are subject to change. Current prices can be obtained by writing to the above address. When ordering or inquiring about prices for any of these publications, please give the title, book number, chapter number, and mention the "U.S. Geological Survey Techniques of Water-Resources Investigations."

### Book 1. Collection of Water Data by Direct Measurement

#### Section D. Water Quality

- 1-D1. *Water temperature—influential factors, field measurement, and data presentation*, by H. H. Stevens, Jr., J.F. Ficke, and G. F. Smoot: USGS–TWRI book 1, chap. D1. 1975. 65 p.
- 1-D2. *Guidelines for collection and field analysis of ground-water samples for selected unstable constituents*, by W.W. Wood: USGS–TWRI book 1, chap. D2. 1976. 24 p.

### Book 2. Collection of Environmental Data

#### Section D. Surface Geophysical Methods

- 2-D1. *Application of surface geophysics to ground-water investigations*, by A.A. R. Zohdy, G.P. Eaton, and D.R. Mabey: USGS–TWRI book 2, chap. D1. 1974. 116 p.
- 2-D2. *Application of seismic-refraction techniques to hydrologic studies*, by F.P. Haeni: USGS–TWRI book 2, chap. D2. 1988. 86 p.

#### Section E. Subsurface Geophysical Methods

- 2-E1. *Application of borehole geophysics to water-resources investigations*, by W.S. Keys and L.M. MacCary: USGS–TWRI book 2, chap. E1. 1971. 126 p.
- 2-E2. *Borehole geophysics applied to ground-water investigations*, by W.S. Keys: USGS–TWRI book 2, chap. E2. 1990. 150 p.

#### Section F. Drilling and Sampling Methods

- 2-F1. *Application of drilling, coring, and sampling techniques to test holes and wells*, by Eugene Shuter and W.E. Teasdale: USGS–TWRI book 2, chap. F1. 1989. 97 p.

### Book 3. Applications of Hydraulics

#### Section A. Surface-Water Techniques

- 3-A1. *General field and office procedures for indirect discharge measurements*, by M.A. Benson and Tate Dalrymple: USGS–TWRI book 3, chap. A1. 1967. 30 p.
- 3-A2. *Measurement of peak discharge by the slope-area method*, by Tate Dalrymple and M.A. Benson: USGS–TWRI book 3, chap. A2. 1967. 12 p.
- 3-A3. *Measurement of peak discharge at culverts by indirect methods*, by G.L. Bodhaine: USGS–TWRI book 3, chap. A3. 1968. 60 p.
- 3-A4. *Measurement of peak discharge at width contractions by indirect methods*, by H.F. Matthai: USGS–TWRI book 3, chap. A4. 1967. 44 p.
- 3-A5. *Measurement of peak discharge at dams by indirect methods*, by Harry Hulsing: USGS–TWRI book 3, chap. A5. 1967. 29 p.
- 3-A6. *General procedure for gaging streams*, by R.W. Carter and Jacob Davidian: USGS–TWRI book 3, chap. A6. 1968. 13 p.
- 3-A7. *Stage measurement at gaging stations*, by T.J. Buchanan and W.P. Somers: USGS–TWRI book 3, chap. A7. 1968. 28 p.
- 3-A8. *Discharge measurements at gaging stations*, by T.J. Buchanan and W.P. Somers: USGS–TWRI book 3, chap. A8. 1969. 65 p.
- 3-A9. *Measurement of time of travel in streams by dye tracing*, by F.A. Kilpatrick and J.F. Wilson, Jr.: USGS–TWRI book 3, chap. A9. 1989. 27 p.
- 3-A10. *Discharge ratings at gaging stations*, by E.J. Kennedy: USGS–TWRI book 3, chap. A10. 1984. 59 p.
- 3-A11. *Measurement of discharge by the moving-boat method*, by G.F. Smoot and C.E. Novak: USGS–TWRI book 3, chap. A11. 1969. 22 p.
- 3-A12. *Fluorometric procedures for dye tracing*, Revised, by J.F. Wilson, Jr., E.D. Cobb, and F.A. Kilpatrick: USGS–TWRI book 3, chap. A12. 1986. 34 p.
- 3-A13. *Computation of continuous records of streamflow*, by E.J. Kennedy: USGS–TWRI book 3, chap. A13. 1983. 53 p.
- 3-A14. *Use of flumes in measuring discharge*, by F.A. Kilpatrick and V.R. Schneider: USGS–TWRI book 3, chap. A14. 1983. 46 p.
- 3-A15. *Computation of water-surface profiles in open channels*, by Jacob Davidian: USGS–TWRI book 3, chap. A15. 1984. 48 p.
- 3-A16. *Measurement of discharge using tracers*, by F.A. Kilpatrick and E.D. Cobb: USGS–TWRI book 3, chap. A16. 1985. 52 p.
- 3-A17. *Acoustic velocity meter systems*, by Antonius Laenen: USGS–TWRI book 3, chap. A17. 1985. 38 p.
- 3-A18. *Determination of stream reaeration coefficients by use of tracers*, by F.A. Kilpatrick, R.E. Rathbun, Nobuhiro Yotsukura, G.W. Parker, and L.L. DeLong: USGS–TWRI book 3, chap. A18. 1989. 52 p.
- 3-A19. *Levels at streamflow gaging stations*, by E.J. Kennedy: USGS–TWRI book 3, chap. A19. 1990. 31 p.

- 3-A20. *Simulation of soluble waste transport and buildup in surface waters using tracers*, by F.A. Kilpatrick: USGS–TWRI book 3, chap. A20. 1993. 38 p.
- 3-A21. *Stream-gaging cableways*, by C. Russell Wagner: USGS–TWRI book 3, chap. A21. 1995. 56 p.

#### **Section B. Ground-Water Techniques**

- 3-B1. *Aquifer-test design, observation, and data analysis*, by R.W. Stallman: USGS–TWRI book 3, chap. B1. 1971. 26 p.
- 3-B2. *Introduction to ground-water hydraulics, a programmed text for self-instruction*, by G.D. Bennett: USGS–TWRI book 3, chap. B2. 1976. 172 p.
- 3-B3. *Type curves for selected problems of flow to wells in confined aquifers*, by J.E. Reed: USGS–TWRI book 3, chap. B3. 1980. 106 p.
- 3-B4. *Regression modeling of ground-water flow*, by R.L. Cooley and R.L. Naff: USGS–TWRI book 3, chap. B4. 1990. 232 p.
- 3-B4. *Supplement 1. Regression modeling of ground-water flow --Modifications to the computer code for nonlinear regression solution of steady-state ground-water flow problems*, by R.L. Cooley: USGS–TWRI book 3, chap. B4. 1993. 8 p.
- 3-B5. *Definition of boundary and initial conditions in the analysis of saturated ground-water flow systems—An introduction*, by O.L. Franke, T.E. Reilly, and G.D. Bennett: USGS–TWRI book 3, chap. B5. 1987. 15 p.
- 3-B6. *The principle of superposition and its application in ground-water hydraulics*, by T.E. Reilly, O.L. Franke, and G.D. Bennett: USGS–TWRI book 3, chap. B6. 1987. 28 p.
- 3-B7. *Analytical solutions for one-, two-, and three-dimensional solute transport in ground-water systems with uniform flow*, by E.J. Wexler: USGS–TWRI book 3, chap. B7. 1992. 190 p.
- 3-B8. *System and boundary conceptualization in ground-water flow simulation*, by T.E. Reilly: USGS–TWRI book 3, chap. B8. 2001. 29 p.

#### **Section C. Sedimentation and Erosion Techniques**

- 3-C1. *Fluvial sediment concepts*, by H.P. Guy: USGS–TWRI book 3, chap. C1. 1970. 55 p.
- 3-C2. *Field methods for measurement of fluvial sediment*, by T.K. Edwards and G.D. Glysson: USGS–TWRI book 3, chap. C2. 1999. 89 p.
- 3-C3. *Computation of fluvial-sediment discharge*, by George Porterfield: USGS–TWRI book 3, chap. C3. 1972. 66 p.

### **Book 4. Hydrologic Analysis and Interpretation**

#### **Section A. Statistical Analysis**

- 4-A1. *Some statistical tools in hydrology*, by H.C. Riggs: USGS–TWRI book 4, chap. A1. 1968. 39 p.
- 4-A2. *Frequency curves*, by H.C. Riggs: USGS–TWRI book 4, chap. A2. 1968. 15 p.

#### **Section B. Surface Water**

- 4-B1. *Low-flow investigations*, by H.C. Riggs: USGS–TWRI book 4, chap. B1. 1972. 18 p.
- 4-B2. *Storage analyses for water supply*, by H.C. Riggs and C.H. Hardison: USGS–TWRI book 4, chap. B2. 1973. 20 p.
- 4-B3. *Regional analyses of streamflow characteristics*, by H.C. Riggs: USGS–TWRI book 4, chap. B3. 1973. 15 p.

#### **Section D. Interrelated Phases of the Hydrologic Cycle**

- 4-D1. *Computation of rate and volume of stream depletion by wells*, by C.T. Jenkins: USGS–TWRI book 4, chap. D1. 1970. 17 p.

### **Book 5. Laboratory Analysis**

#### **Section A. Water Analysis**

- 5-A1. *Methods for determination of inorganic substances in water and fluvial sediments*, by M.J. Fishman and L.C. Friedman, editors: USGS–TWRI book 5, chap. A1. 1989. 545 p.
- 5-A2. *Determination of minor elements in water by emission spectroscopy*, by P.R. Barnett and E.C. Mallory, Jr.: USGS–TWRI book 5, chap. A2. 1971. 31 p.
- 5-A3. *Methods for the determination of organic substances in water and fluvial sediments*, edited by R.L. Wershaw, M.J. Fishman, R.R. Grabbe, and L.E. Lowe: USGS–TWRI book 5, chap. A3. 1987. 80 p.
- 5-A4. *Methods for collection and analysis of aquatic biological and microbiological samples*, by L.J. Britton and P.E. Greeson, editors: USGS–TWRI book 5, chap. A4. 1989. 363 p.
- 5-A5. *Methods for determination of radioactive substances in water and fluvial sediments*, by L.L. Thatcher, V.J. Janzer, and K.W. Edwards: USGS–TWRI book 5, chap. A5. 1977. 95 p.
- 5-A6. *Quality assurance practices for the chemical and biological analyses of water and fluvial sediments*, by L.C. Friedman and D.E. Erdmann: USGS–TWRI book 5, chap. A6. 1982. 181 p.

#### **Section C. Sediment Analysis**

- 5-C1. *Laboratory theory and methods for sediment analysis*, by H.P. Guy: USGS–TWRI book 5, chap. C1. 1969. 58 p.

### **Book 6. Modeling Techniques**

#### **Section A. Ground Water**

- 6-A1. *A modular three-dimensional finite-difference ground-water flow model*, by M.G. McDonald and A.W. Harbaugh: USGS–TWRI book 6, chap. A1. 1988. 586 p.

- 6-A2. *Documentation of a computer program to simulate aquifer-system compaction using the modular finite-difference ground-water flow model*, by S.A. Leake and D.E. Prudic: USGS–TWRI book 6, chap. A2. 1991. 68 p.
- 6-A3. *A modular finite-element model (MODFE) for areal and axisymmetric ground-water-flow problems, Part 1: Model Description and User's Manual*, by L.J. Torak: USGS–TWRI book 6, chap. A3. 1993. 136 p.
- 6-A4. *A modular finite-element model (MODFE) for areal and axisymmetric ground-water-flow problems, Part 2: Derivation of finite-element equations and comparisons with analytical solutions*, by R.L. Cooley: USGS–TWRI book 6, chap. A4. 1992. 108 p.
- 6-A5. *A modular finite-element model (MODFE) for areal and axisymmetric ground-water-flow problems, Part 3: Design philosophy and programming details*, by L.J. Torak: USGS–TWRI book 6, chap. A5, 1993. 243 p.
- 6-A6. *A coupled surface-water and ground-water flow model (MODBRANCH) for simulation of stream-aquifer interaction*, by Eric D. Swain and Eliezer J. Wexler: USGS–TWRI book 6, chap. A5, 1996. 125 p.

## **Book 7. Automated Data Processing and Computations**

### **Section C. Computer Programs**

- 7-C1. *Finite difference model for aquifer simulation in two dimensions with results of numerical experiments*, by P.C. Trescott, G.F. Pinder, and S.P. Larson: USGS–TWRI book 7, chap. C1. 1976. 116 p.
- 7-C2. *Computer model of two-dimensional solute transport and dispersion in ground water*, by L.F. Konikow and J.D. Bredehoeft: USGS–TWRI book 7, chap. C2. 1978. 90 p.
- 7-C3. *A model for simulation of flow in singular and interconnected channels*, by R.W. Schaffranek, R.A. Baltzer, and D.E. Goldberg: USGS–TWRI book 7, chap. C3. 1981. 110 p.

## **Book 8. Instrumentation**

### **Section A. Instruments for Measurement of Water Level**

- 8-A1. *Methods of measuring water levels in deep wells*, by M.S. Garber and F.C. Koopman: USGS–TWRI book 8, chap. A1. 1968. 23 p.
- 8-A2. *Installation and service manual for U.S. Geological Survey manometers*, by J.D. Craig: USGS–TWRI book 8, chap. A2. 1983. 57 p.

### **Section B. Instruments for Measurement of Discharge**


- 8-B2. *Calibration and maintenance of vertical-axis type current meters*, by G.F. Smoot and C.E. Novak: USGS–TWRI book 8, chap. B2. 1968. 15 p.

## **Book 9. Handbooks for Water-Resources Investigations**


### **Section A. National Field Manual for the Collection of Water-Quality Data**

- 9-A1. *National Field Manual for the Collection of Water-Quality Data: Preparations for Water Sampling*, by F.D. Wilde, D.B. Radtke, Jacob Gibs, and R.T. Iwatsubo: USGS–TWRI book 9, chap. A1. 1998. 47 p.
- 9-A2. *National Field Manual for the Collection of Water-Quality Data: Selection of Equipment for Water Sampling*, edited by F.D. Wilde, D.B. Radtke, Jacob Gibs, and R.T. Iwatsubo: USGS–TWRI book 9, chap. A2. 1998. 94 p.
- 9-A3. *National Field Manual for the Collection of Water-Quality Data: Cleaning of Equipment for Water Sampling*, edited by F.D. Wilde, D.B. Radtke, Jacob Gibs, and R.T. Iwatsubo: USGS–TWRI book 9, chap. A3. 1998. 75 p.
- 9-A4. *National Field Manual for the Collection of Water-Quality Data: Collection of Water Samples*, edited by F.D. Wilde, D.B. Radtke, Jacob Gibs, and R.T. Iwatsubo: USGS–TWRI book 9, chap. A4. 1999. 156 p.
- 9-A5. *National Field Manual for the Collection of Water-Quality Data: Processing of Water Samples*, edited by F.D. Wilde, D.B. Radtke, Jacob Gibs, and R.T. Iwatsubo: USGS–TWRI book 9, chap. A5. 1999. 149 p.
- 9-A6. *National Field Manual for the Collection of Water-Quality Data: Field Measurements*, edited by F.D. Wilde and D.B. Radtke: USGS–TWRI book 9, chap. A6. 1998. Variously paginated.
- 9-A7. *National Field Manual for the Collection of Water-Quality Data: Biological Indicators*, edited by D.N. Myers and F.D. Wilde: USGS–TWRI book 9, chap. A7. 1997 and 1999. Variously paginated.
- 9-A8. *National Field Manual for the Collection of Water-Quality Data: Bottom-material samples*, by D.B. Radtke: USGS–TWRI book 9, chap. A8. 1998. 48 p.
- 9-A9. *National Field Manual for the Collection of Water-Quality Data: Safety in Field Activities*, by S.L. Lane and R.G. Fay: USGS–TWRI book 9, chap. A9. 1998. 60 p.

SUSQUEHANNA RIVER BASIN

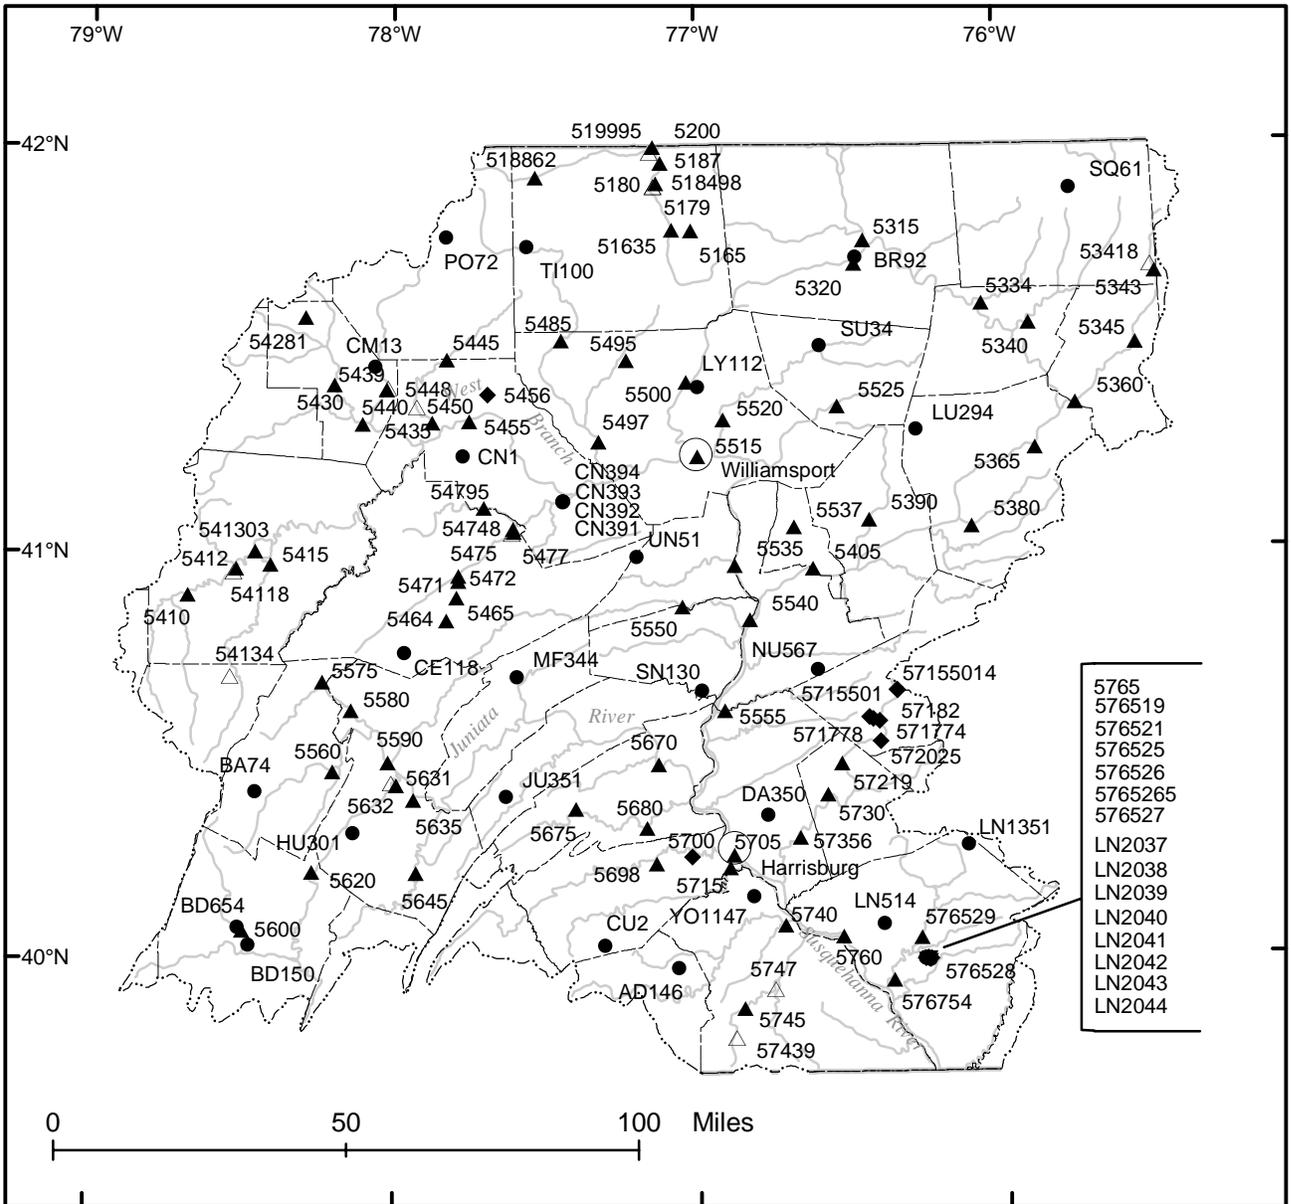

EXPLANATION

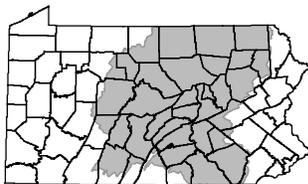


- ▲ Streamflow station
- △ Lake
- ◆ Streamflow and water –quality station
- ▼ Water –quality station
- Observation well

NOTE: Downstream station numbers are abbreviated; the first two digits (part number) and the last two digits (if zeros) are omitted (for example, station number 01573560 is shown as 57356, and station number 01570000 is shown as 5700).

Figure 5.--Location of continuous-record data-collection stations and network observation wells, Susquehanna River Basin.

SUSQUEHANNA RIVER BASIN

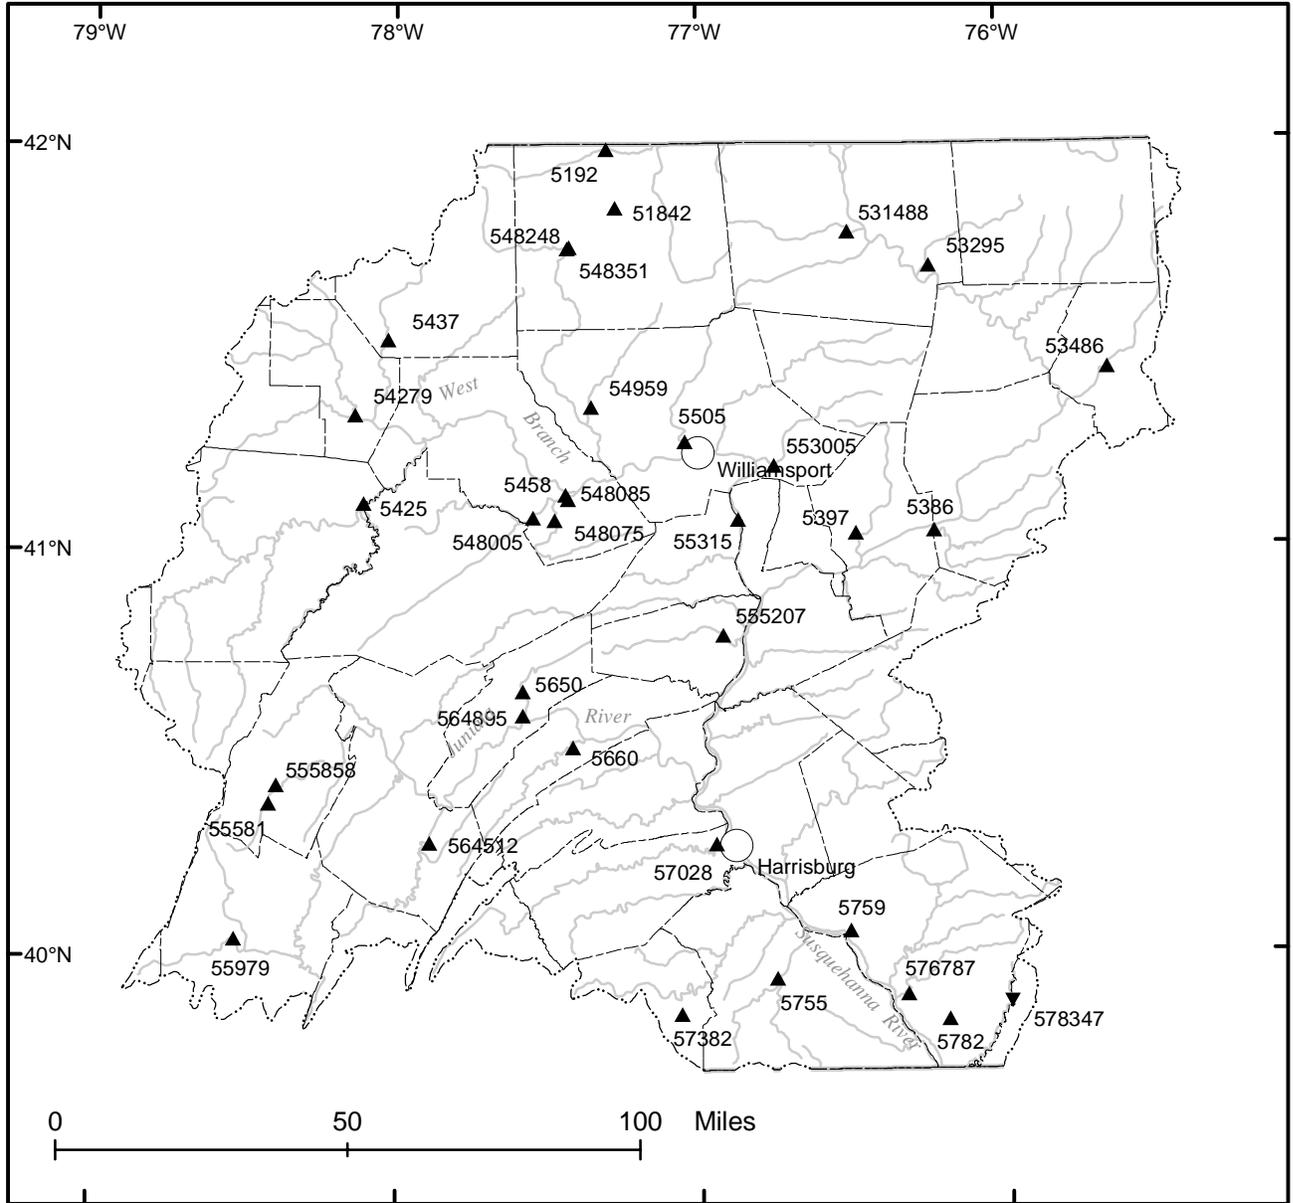

EXPLANATION

- ▲ Streamflow station
- ▼ Water-quality station

NOTE: Downstream station numbers are abbreviated; the first two digits (part number) and the last two digits (if zeros) are omitted (for example, station number 01570280 is shown as 57028, and station number 01577500 is shown as 5775).


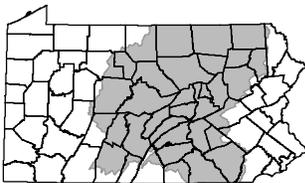



Figure 6.--Location of partial-record data-collection stations, Susquehanna River Basin.

POTOMAC RIVER BASIN

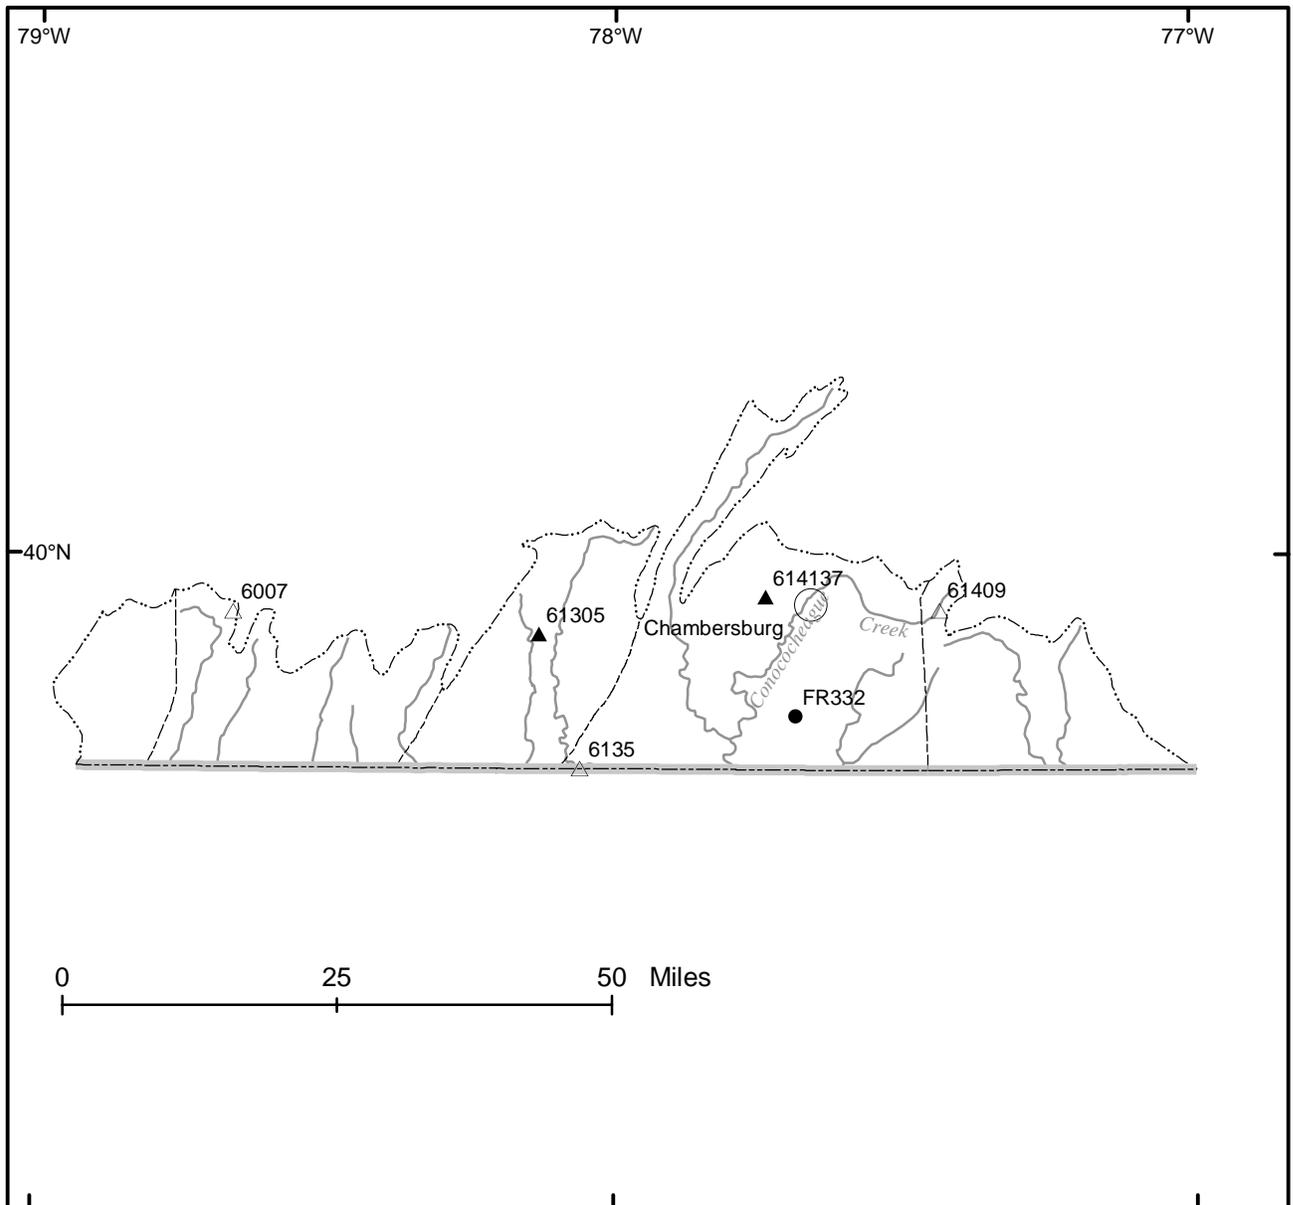

EXPLANATION

- ▲ Continuous –record streamflow station
- △ Partial –record streamflow station
- Observation well

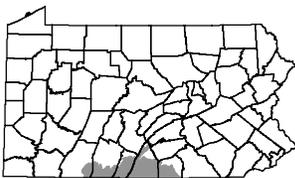

NOTE: Downstream station numbers are abbreviated; the first two digits (part number) and the last two digits (if zeros) are omitted (for example, station number 01613050 is shown as 61305, and station number 01613500 is shown as 6135).

Figure 7.--Location of continuous- and partial-record data-collection stations, Potomac River Basin.

**SPECIAL NOTES, REMARK CODES, AND SELECTED CONSTITUENT DEFINITIONS**

\*\*\*\*\*

**NOTES**--Traditionally, dissolved trace-element concentrations have been reported at the microgram per liter( $\mu\text{G/L}$ ) level. Recent evidence, mostly from large rivers, indicates that actual dissolved-phase concentrations for a number of trace elements are within the range of 10's to 100's of nanograms per liter (ng/L). Data above the  $\mu\text{G/L}$  level should be viewed with caution. Such data may actually represent elevated environmental concentrations from natural or human causes; however, these data could reflect contamination introduced during sampling, processing, or analysis. To confidently produce dissolved trace-element data with insignificant contamination, the U.S. Geological Survey began using new trace-element protocols at some stations in water year 1994. Full implementation of the protocols took place during the 1995 water year.

--Sample handling procedures at all **National Trends Network** stations were changed substantially on January 11, 1994, in order to reduce contamination from the sample shipping container. The data for samples before and after that date are different and not directly comparable. A tabular summary of the differences based on a special intercomparison study, is available from the NADP/NTN Coordination Office, Colorado State University, Fort Collins, CO 80523 (Telephone: 303-491-5643).

--In March 1989 a bias was discovered in the turbidimetric method for sulfate analysis for those samples analyzed by the U.S. Geological Survey National Water-Quality Laboratory indicating that values below 75 mg/L have a median positive bias of 2 mg/L above the true value for the period between 1982 and 1989.

--**Methylene blue active substance (MBAS)** determinations made from January 1, 1970, through August 29, 1993, at the National Water Quality Laboratory in Denver (Analyzing Agency Code 80020) are positively biased. These data can be corrected on the basis of the following equation, if concentrations of dissolved nitrate plus nitrite, as nitrogen, and dissolved chloride, determined concurrently with the MBAS data are applied:

$$\text{MBASCOR} = \text{M} - 0.0088\text{N} - 0.00019\text{C}$$

where:

MBASCOR = corrected MBAS concentration, in mg/L;  
M = reported MBAS concentration, in mg/L;  
N = dissolved nitrate plus nitrite, as nitrogen, in mg/L; and  
C = dissolved chloride concentration, in mg/L.

The detection limit of the new method is 0.02 mg/L, whereas the detection limit for the old method was 0.01 mg/L. A detection limit of 0.02 mg/L should be used with corrected MBAS data from January 1, 1970, through August 29, 1993.

\*\*\*\*\*

**Remark Codes**--The following remark codes may appear with the data tables in this report:

**PRINTED OUTPUT**

**REMARK**

E,e	Estimated value.
>	Actual value is known to be greater than the value shown.
<	Actual value is known to be less than the value shown.
M	Presence of material verified but not quantified.
K	Results based on colony count outside the acceptance range (non-ideal colony count).
L	Biological organism count less than 0.5 percent (organism may be observed rather than counted).
D	Biological organism count equal to or greater than 15 percent (dominant).
ND	Material specifically analyzed for but not detected.
V	Analyte was detected in both the environmental sample and the associated blanks.

\*\*\*\*\*

**EXPLANATION OF CODES USED TO DEFINE SAMPLE COLLECTION PROCEDURES (partial listing)**

**(71999) SAMPLE PURPOSE CODES:**

- 10--Routine
- 15--NAWQA
- 20--NASQAN
- 30--Benchmark

**(84164) SAMPLER TYPE: (partial list)**

- 110--Sewage sampler
- 3011--US D-77
- 3035--DH-76 Trace metal sampler with teflon gasket and nozzle
- 3039--D-77 Trace metal
- 3040--D-77 Trace metal modified teflon bag sampler
- 3045--DH-81 with Teflon cap and nozzle
- 8010--Other (other than a defined sampler type)

**(82398) SAMPLE METHOD CODES:**

- 10--Equal width increment
- 20--Equal discharge increment
- 30--Single vertical
- 40--Multiple verticals
- 50--Point sample
- 70--Grab sample
- 120--Velocity integrated
- 8010--Other

**SPECIAL NOTES, REMARK CODES AND SELECTED CONSTITUENT DEFINITIONS--Continued**

**Explanation of selected abbreviations used in constituent definitions in water-quality tables:**

AC-FT	acre-feet
BOT MAT	bottom material (Unconsolidated material of which a streambed, lake, pond, reservoir, or estuary bottom is composed.)
COLS/100 ML	colonies per 100 milliliters
DIS	dissolved
FET	fixed end-point titration
FLD	field (Measurement determined at field site.)
F/S	feet per second
G/M	gallons per minute
G/SQM; MG/M2	grams or milligrams per square meter
IT	incremental titration
KF AGAR	nutrient medium for growth of fecal streptococcal bacteria
µG/L	micrograms per liter
µS/CM	microsiemens per centimeter
MG/L	milligrams per liter
MG/M2	milligrams per square meter
MM OF HG	millimeters of mercury
NONCARB	noncarbonate
NTU	nephelometric turbidity unit
PCI/L	picocuries per liter
REC	recoverable
TOT	total
T/DAY	tons per day
WH IT	whole water, incremental titration (Alkalinity, bicarbonate, and carbonate as determined by incremental titration of unfiltered water at the field site.)
2 SIGMA	Counting statistic that represents error in the reported radon, uranium, or tritium value caused by variations in sample counting, background radiation, volume of sample, and decay since sample was collected.
0.7µ GF	0.7 micron glass-fiber filter (Water filtered through a glass-fiber membrane filter with openings that are 0.7 microns in size.)

\*\*\*\*\*

**(00027) AGENCY COLLECTING SAMPLE CODES:**

1028 --U.S. Geological Survey

**(00028) AGENCY ANALYZING SAMPLE CODES:**

1028 --U.S. Geological Survey  
80020 --U.S. Geological Survey, National Water-Quality Laboratory, Denver, Colorado  
930 --National Institute of Occupational Safety and Health  
9813 --Pennsylvania Department of Environmental Protection  
83613 --District Water-Quality Laboratory, Troy, New York  
36015 --Environmental Associates  
42016 --Penn State University